

Version	Worktop - 90 cm - Customisable top panel - 800 m ³ /h
Collection	Design
TECHNICAL FEATURES	
Materials/Finishes	Smoked tempered glass
Materials/Finishes	Aluminium finishing black matt
Materials/Finishes	Customisable upper panel
Features	Up/Down lift system with height adjustment Motor position adjustment system to optimise cabinet space Grease and odour filter basket with liquid collection tray Automatic cut-off timer
Control	Touch control Dialogue system Remote control (optional)
Function	Extracting/Filtering
Lighting	Dynamic Light (2700K - 5600K) Strip LED 7 W - 2700 K / 5600 K
Filters	Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional)
Motor	Brushless Motor
Dimensions	90 cm



Photograph is for information purposes only. May not correspond to the selected version

CONNECTION AND CONSUMPTION FUNCTIONS


Maximum consumption	180 W
Voltage/Frequency	220-240V 50-60Hz

MOTOR

Motor	Brushless Motor 800 m ³ /h
Maximum capacity	665 m ³ /h I.E.C.61591
Maximum sound level	64 dB (A)re1pW I.E.C. 60704-2-13
Energy class	A++

WEIGHTS AND VOLUMES

Gross weight	39 kg
Net weight	31.9 kg
Volume	0.37 m ³
Packaging dimensions	L 1070 x H 402 x P 870 mm

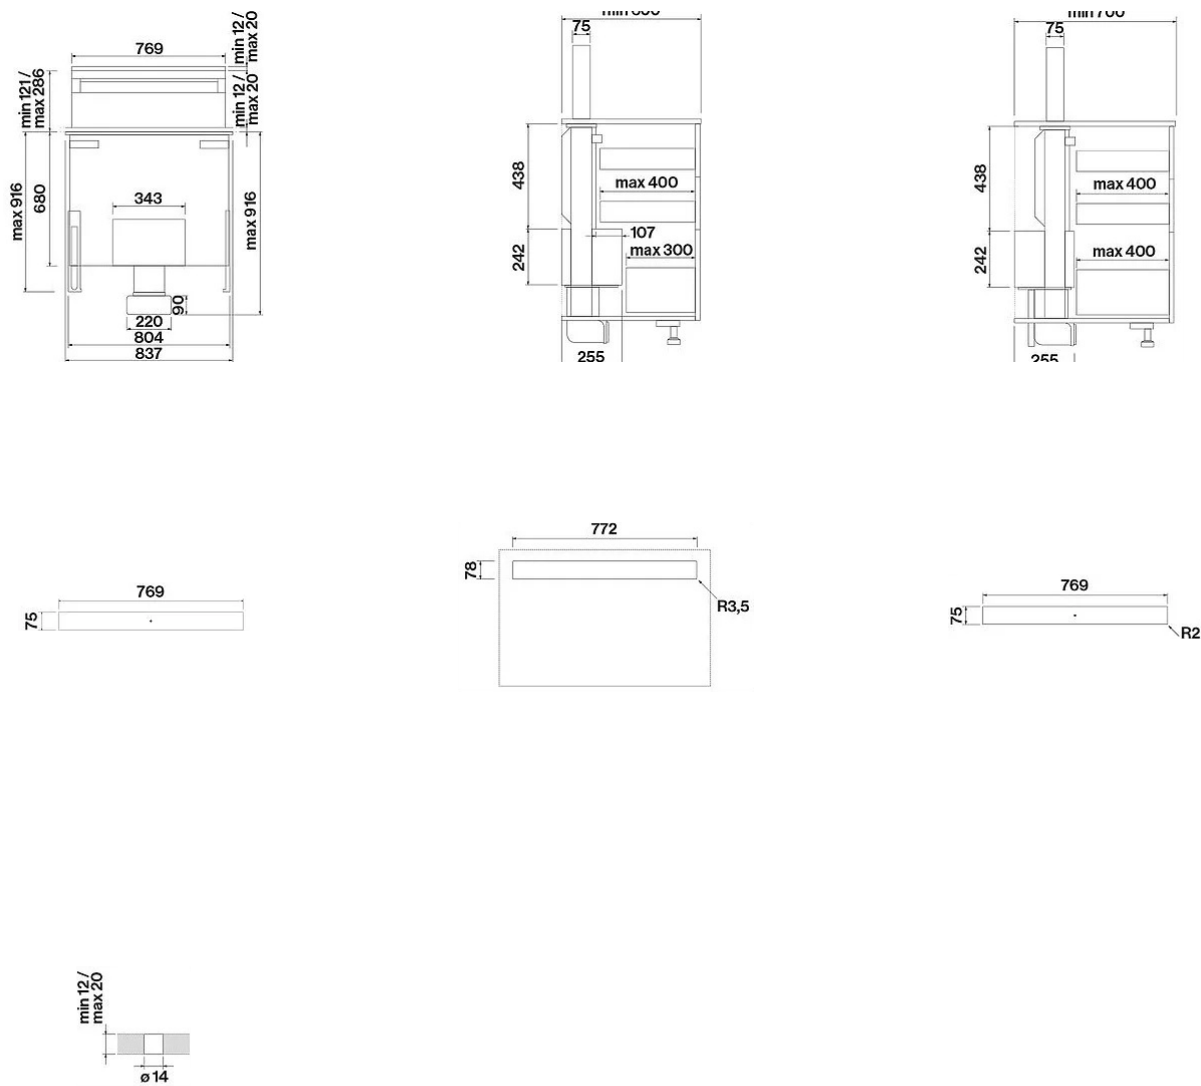

Cut-out - activation sensor

Optional accessories

Code	Description
KACL.1042	Carbon.Zeo Microtech regenerable filter (2x)
105080053	Remote control

FLOW RATE / PRESSURE

PF		
S		
M	Worktop - 90 cm - Customisable top panel - 800 m3/h	
AEC	28.1	kWh/a
EEC	A++	
FDE	40.3	
FDEC	A	
LE	0.3	
LEC	G	
GFE	87	
GFEC	B	
Qmin	435	m ³ /h
Qmax	605	m ³ /h
Qboost	665	m ³ /h
SPEmin	56	dBa
SPEmax	64	dBa
SPEboost	65	dBa
PO		
PS	0	W
PI		
F	0	
EEL	33	
Qbep	414	m ³ /h
Pbep	413	Pa
Qboost	665	m ³ /h
Wbep	119	W
WL	9	W
Emiddle	3	lux
Lwa-SPEmax	64	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.