

Version	Built-in - 60 cm - Black - 800 m3/h
Design	Falmec Lab
Collection	Silence - NRS
TECHNICAL FEATURES	
Materials/Finishes	Painted black steel
Technology	NRS technology for a quieter kitchen
Features	Rotatable tempered glass flap with integrated control
	Protective flaps for the edge of the wall unit
Control	Touch control
Function	Extracting/Filtering
Lighting	Dynamic Light (2700K - 5600K)
	Strip LED 3,5 W - 2700 K / 5600 K
Filters	Metallic grease filter, removable and washable
	Carbon.Zeo Microtech renewable filter (optional)
Dimensions	60 cm
Minimum Electric hob distance	52 cm
Minimum Gas hob distance	52 cm
Notes	

CONNECTION AND CONSUMPTION FUNCTIONS

Maximum consumption	280 W
Voltage/Frequency	220-240V 50-60Hz

MOTOR



Motor	800 m³/h
Maximum capacity	636 m³/h I.E.C.61591
Maximum sound level	51 dB (A)re1pW I.E.C. 60704-2-13
Energy class	A

WEIGHTS AND VOLUMES

Gross weight	23 kg
Net weight	19 kg
Volume	0.22 m3
Packaging dimensions	L 775 x H 412 x P 705 mm




Photograph is for information purposes only. May not correspond to the selected version



Optional accessories

<i>Code</i>	<i>Description</i>
KACL.400	Silent / Conveyer NRS
KACL.1039	Carbon.Zeo Microtech renewable filter
KCVJN.19#N	Chimney kit Virgola Touch NRS H 315 + extension H 295 - Black

FLOW RATE / PRESSURE

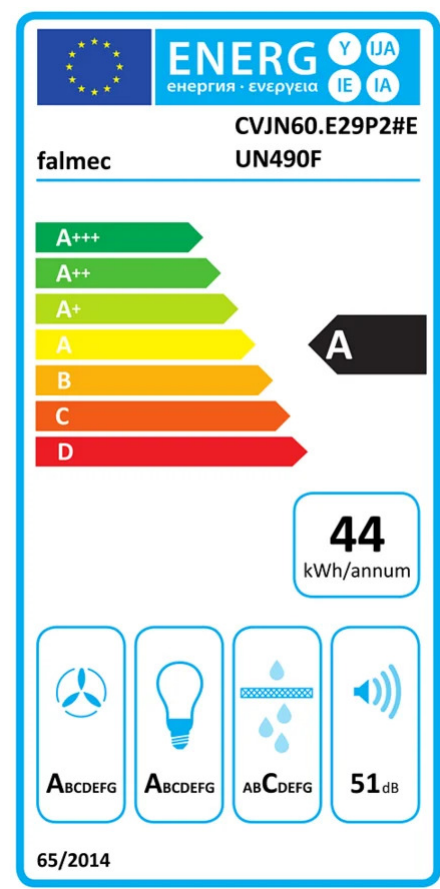

PF		
S	Falmec Lab	
M	Built-in - 60 cm - Black - 800 m3/h	
AEC	0	kWh/a
EEC	A	
FDE	0	
LE	0	
GFE	0	
Qmin	0	m³ /h
Qmax	0	m³ /h
Qboost	636	m³ /h
SPEmin	39	dBa
SPEmax	51	dBa
SPEboost	0	dBa
PO	0	W
PS	0	W

PI		
F	0	
EEL	0	
Qbep	0	m³ /h
Pbep	0	Pa
Qboost	636	m³ /h
Wbep	0	W
WL	3.5	W
Emiddle	154	lux
Lwa-SPEmax	51	dBa

PF_Scheda prodotto conforme a 65/2014 S_Vendor name / M_Project identification / AEC_Yearly energy consumption (AEC) hood / EEC_Energy efficiency class / FDE_Fluid dynamic efficiency (FDE) hood / FDEC_Fluid dynamic efficiency class / LE_Light efficiency (LE) hood / LEC_Light efficiency class of luminous efficiency / GFE_Fat filtration efficiency / GFEC_Fat filtration efficiency class / Qmin_Airflow (in m³/h) at minimum power under normal use conditions / Qmax_Airflow (in m³/h) at maximum power under normal use conditions / Qboost_Airflow (in m³/h) at the intensive power / SPEmin_A-weighted sound power of airborne noise emissions at the minimum power under normal use conditions / SPEmax_A-weighted sound power of airborne noise emissions at the maximum power under normal use conditions / SPEboost_A-weighted sound power of airborne noise emissions under intensive or boost use conditions / P0_CPower consumption in off mode (Po) / Ps_CPower consumption in standby mode (Ps).

PI_Additional information in accordance with 66/2014 4 F_Fattore di incremento nel tempo / EEL_Indice di efficienza energetica / Qbep_Velocità del flusso d'aria misurato nel punto di efficienza migliore / Pbep_Pressione dell'aria misurata nel punto di efficienza migliore / Qboost_Flusso d'aria massimo / Wbep_Ingresso energia elettrica misurato nel punto di efficienza migliore / WL_Potenza nominale del sistema luminoso / Emiddle_Illuminazione media del sistema luminoso sulla superficie di cottura / Lwa=SPEmax_Livello di pressione sonora alla potenza massima.