

## FUSION

### Version

Wall 85 cm - satin black - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122366241



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

Touch control  
Optional remote control  
Dimmable led lighting  
Dynamic LED Light (2700K - 5600K)  
Dialogue system

Available from Dec.2023

## OPTIONAL ACCESSORIES

**KACL.961**  
Charcoal and Zeolite filter  
**KCQAN.00#N**  
Optional chimney (Black)  
**105080053**  
Remote control

## TECHNICAL FEATURES




**Installation type**  
Wall  
**Dimensions**  
85 cm  
**Finishing**  
Painted steel  
Black glass satin finishing  
**Motor**  
800 m<sup>3</sup>/h  
**Type of control**  
Touch control  
**Speed settings**  
4  
**Lighting**  
Strip Led 5,8 W - 2700 K / 5600 K  
**Minimum distance**  
Gas hob: 52 cm  
Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

**Gross weight**  
30 kg  
**Net weight**  
25 kg  
**Volumes**  
0.27 m<sup>3</sup>  
**Packaging size**  
Length  
950 mm  
Height  
440 mm  
Depth  
655 mm

## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
280 W  
**Voltage**  
220-240V  
**Frequency**  
50-60Hz  
**ENERGY CLASS**  
A



## FUSION

### Version

Wall 85 cm - satin black - 800 m3/h


### Collection

Design

### EAN code

8034122366241

## ENERGY LABEL

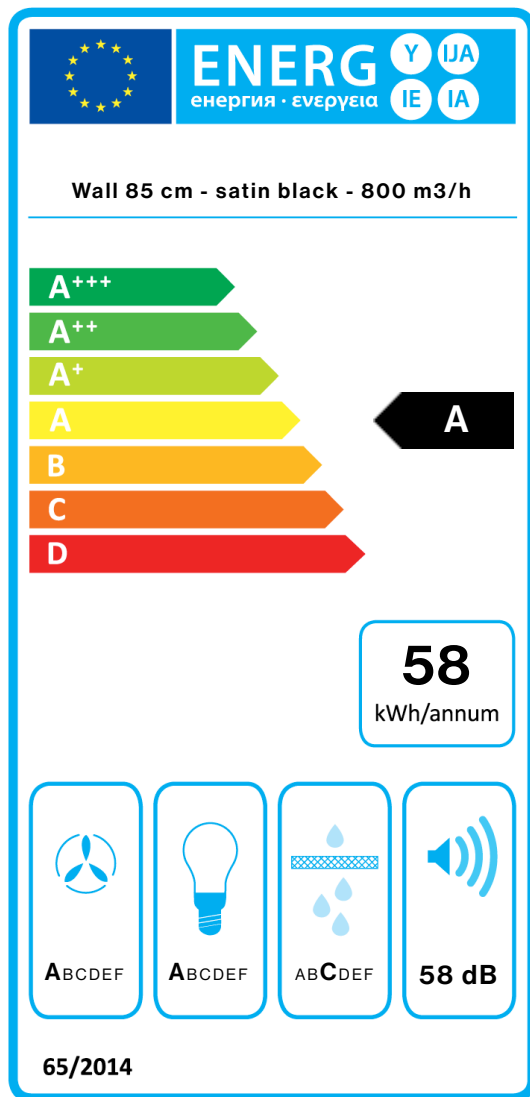

PF		
S	Falmec Spa	
M	Wall 85 cm - satin black - 800 m3/h	
AEC	58,1	kWh/a
EEC	A	
FDE	29,4	
FDEC	A	
LE	29,6	
LEC	A	
GFE	82,0	
GFEC	C	
Qmin	295,0	m <sup>3</sup> /h
Qmax	500,0	m <sup>3</sup> /h
Qboost	750,0	m <sup>3</sup> /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,28	W
PI		
F	0.9	
EEL	53,4	
Qbep	430,0	m <sup>3</sup> /h
Pbep	404	Pa
Qboost	750,0	m <sup>3</sup> /h
Wbep	164,0	W
WL	5,80	W
Emiddle	172	lux
Lwa-SPEmax	58	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.