

GRUPPO INCASSO PLUS

Version

Plus - Built-in 70 cm - Black -
800 m³/h

Collection

Design

EAN code

8034122367231



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable and washable
Optional charcoal filter
Optional remote control
Dimmable led lighting
Dynamic LED Light (2700K - 5600K)
Dialogue system

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m³/h
Brushless

KACL.782#49F
Slim motor 800 m³/h

KACL.786#41F
Outdoor extractor fan 1000 m³/h

KACL.796#4AF
Outdoor extractor fan 1500 m³/h

KACL.797#4AF
Remote under-roof motor 1300 m³/h

KACL.798#41F
Remote under-roof motor 950 m³/h

103050091
Round charcoal filter Ø170 mm - Type 6

105080053
Remote control

TECHNICAL FEATURES

Installation type
Built-in

Dimensions
70 cm

Finishing
Painted black steel

Motor
800 m³/h

Type of control
Electronic control

Speed settings
4

Lighting
Led 2x2,3 W - 2700 K / 5600 K

Minimum distance
Gas hob: 62 cm
Electric hob: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

Gross weight
12 kg

Net weight
9.4 kg

Volumes
0.12 m³

Packaging size
Length
855 mm
Height
380 mm
Depth
375 mm


CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W

Current
220-240V

Frequency
50-60Hz

ENERGY CLASS
B

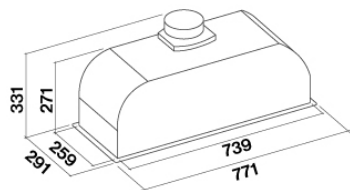

GRUPPO INCASSO PLUS

Version

Plus - Built-in 70 cm - Black -
800 m³/h


Collection

Design

EAN code

8034122367231

ENERGY LABEL

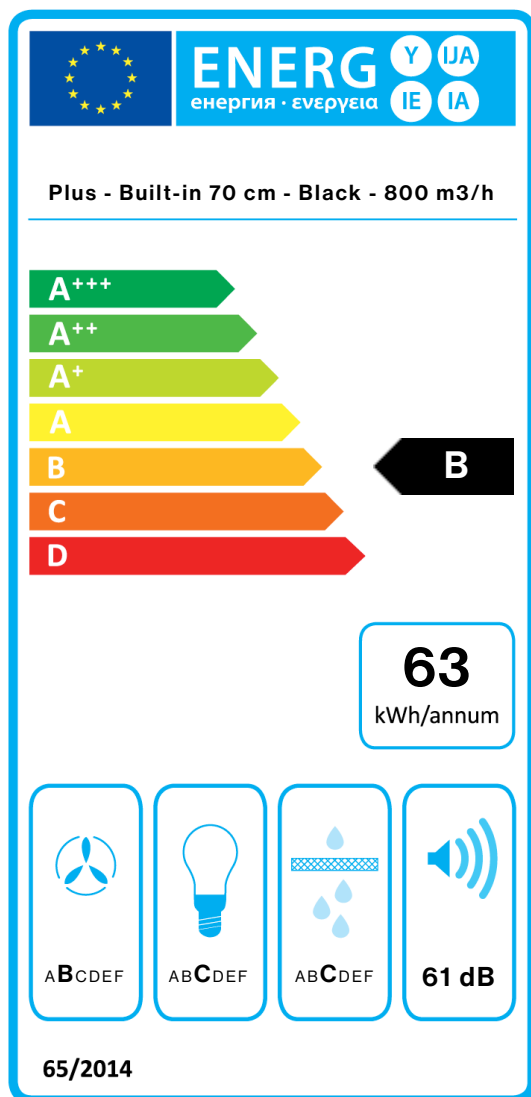

| PF | | |
|------------|---|-------------------|
| S | Falmec Spa | |
| M | Plus - Built-in 70 cm - Black - 800 m ³ /h | |
| AEC | 62,6 | kWh/a |
| EEC | B | |
| FDE | 25,5 | |
| FDEC | B | |
| LE | 18,0 | |
| LEC | C | |
| GFE | 80,0 | |
| GFEC | C | |
| Qmin | 270,0 | m ³ /h |
| Qmax | 470,0 | m ³ /h |
| Qboost | 670,0 | m ³ /h |
| SPEmin | 49 | dBa |
| SPEmax | 61 | dBa |
| SPEboost | 67 | dBa |
| PO | - | W |
| PS | 0,28 | W |
| PI | | |
| F | 1.1 | |
| EEL | 63,2 | |
| Qbep | 333,0 | m ³ /h |
| Pbep | 407 | Pa |
| Qboost | 670,0 | m ³ /h |
| Wbep | 147,7 | W |
| WL | 4,50 | W |
| Emiddle | 81 | lex |
| Lwa-SPEmax | 61 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.