

MIRA PLUS

Version

Plus - Wall - 40 cm - White -
800 m3/h

Collection

Design

EAN code

8034122368405



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES


- Perimeter suction
- Electronic control
- Metallic grease filter, removable and washable
- Charcoal filter (optional)
- Dimmable lighting
- Dynamic Light (2700K - 5600K)

From 02.09.2024 lighting is dynamic and dimmable while the carbon filter 103050091 is optional.

OPTIONAL ACCESSORIES

103050091

Round charcoal filter Ø170 mm -
Type 6



TECHNICAL FEATURES

- Installation type
Wall
- Dimensions
40 cm
- Finishing
Painted white steel
- Motor
800 m³/h
- Type of control
Electronic control
- Speed
3 + boost
- Ambient lighting
Strip LED
- Minimum distance
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND
VOLUMES

- Gross weight
20 kg
- Net weight
16 kg
- Volumes
0.28 m³
- Packaging size
Length
995 mm
Height
480 mm
Depth
595 mm

CONSUMPTION AND
CONNECTION FEATURES

- Maximum consumption
280 W
- Voltage
220-240V
- Frequency
50-60Hz
- ENERGY CLASS
B


MIRA PLUS

Version
Plus - Wall - 40 cm - White -
800 m3/h

Collection
Design

EAN code
8034122368405

ENERGY LABEL

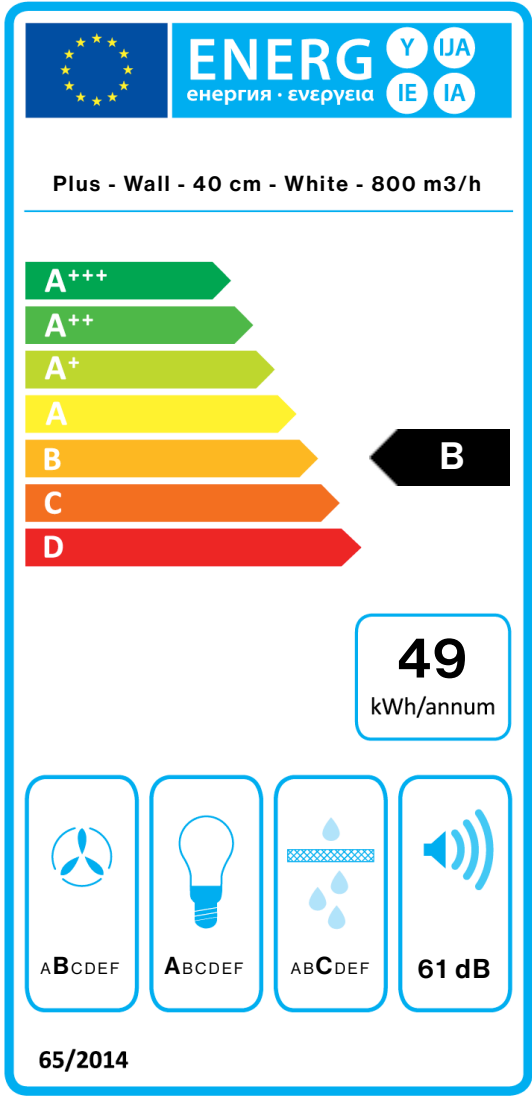

PF		
S	Falmec Spa	
M	Plus - Wall - 40 cm - White - 800 m3/h	
AEC	48,5	kWh/a
EEC	B	
FDE	27,0	
FDEC	B	
LE	29,7	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	264,0	m³/h
Qmax	476,0	m³/h
Qboost	570,0	m³/h
SPEmin	50	dBa
SPEmax	61	dBa
SPEboost	64	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEI	56,1	
Qbep	324,0	m³/h
Pbep	378	Pa
Qboost	570,0	m³/h
Wbep	126,0	W
WL	3,50	W
Emiddle	104	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.