

POLAR EVO

Version

Evo - Wall - 35 cm - Inox - 800 m3/h

Collection

Design

EAN code

8034122369228



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

- Scotch brite stainless steel (AISI 304)
- Electronic control
- Metallic grease filter, removable and washable
- Charcoal filter (optional)
- Dimmable lighting
- Dynamic Light (2700K - 5600K)

OPTIONAL ACCESSORIES

- 103050091
Round charcoal filter Ø170 mm - Type 6

TECHNICAL FEATURES


- Installation type
Wall
- Dimensions
35 cm
- Finishing
Scotch brite stainless steel (AISI 304)
- Motor
800 m³/h
- Type of control
Electronic control
- Speed
3 + boost
- Lighting
Led 3x1,2 W - 2700 K / 5600 K
- Filter
Polar / Polar Light
- Minimum distance
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight
25 kg
- Net weight
21 kg
- Volumes
0.3 m³
- Packaging size
Length
995 mm
Height
500 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
280 W
- Voltage
220-240V
- Frequency
50-60Hz
- ENERGY CLASS
A




POLAR EVO

Version
Evo - Wall - 35 cm - Inox - 800 m3/h

Collection
Design

EAN code
8034122369228

ENERGY LABEL

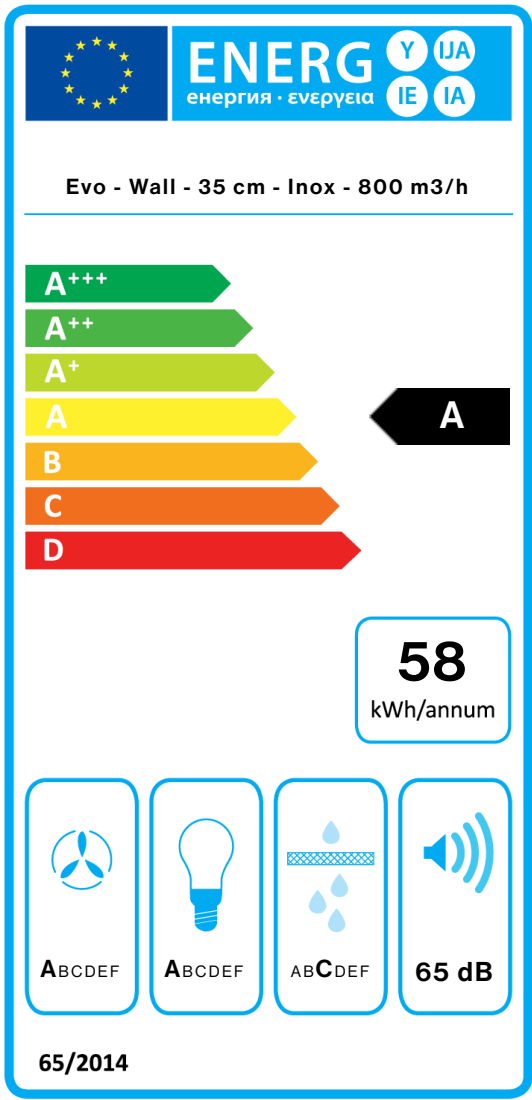

PF		
S	Falmec Spa	
M	Evo - Wall - 35 cm - Inox - 800 m3/h	
AEC	57,6	kWh/a
EEC	A	
FDE	31,6	
FDEC	A	
LE	29,9	
LEC	A	
GFE	76,0	
GFEC	C	
Qmin	354,0	m³/h
Qmax	655,0	m³/h
Qboost	765,0	m³/h
SPEmin	48	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,28	W
PI		
F	0.9	
EEl	53,5	
Qbep	449,0	m³/h
Pbep	411	Pa
Qboost	765,0	m³/h
Wbep	162,0	W
WL	6,00	W
Emiddle	179	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.