

POLAR EVO

Version
Evo - Wall - 35 cm - Copper -
800 m3/h

Collection
Design

EAN code
8034122369198



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

Electronic control
Metallic grease filter, removable and washable
Charcoal filter (optional)
Dimmable lighting
Dynamic Light (2700K - 5600K)
Painted copper steel

OPTIONAL ACCESSORIES

103050091
Round charcoal filter Ø170 mm -
Type 6

TECHNICAL FEATURES


Installation type
Wall
Dimensions
35 cm
Finishing
Painted steel Copper
Motor
800 m³/h
Type of control
Electronic control
Speed
3 + boost
Lighting
Led 3x1,2 W - 2700 K / 5600 K
Filter
Polar / Polar Light
Minimum distance
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND
VOLUMES

Gross weight
25 kg
Net weight
21 kg
Volumes
0.3 m³
Packaging size
Length
995 mm
Height
500 mm
Depth
595 mm

CONSUMPTION AND
CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
ENERGY CLASS
A




POLAR EVO

Version
Evo - Wall - 35 cm - Copper -
800 m3/h

Collection
Design

EAN code
8034122369198

ENERGY LABEL

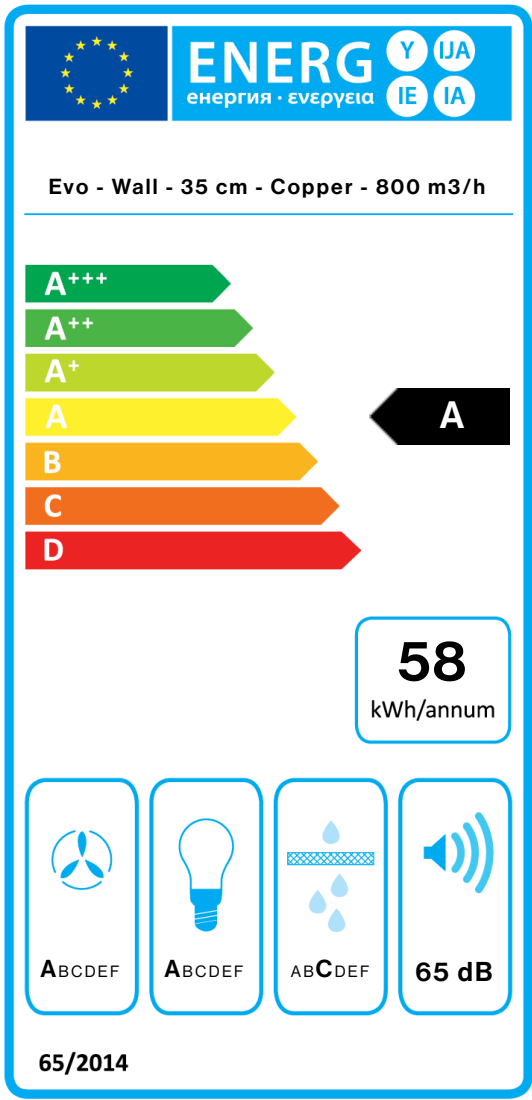

PF		
S	Falmec Spa	
M	Evo - Wall - 35 cm - Copper - 800 m3/h	
AEC	57,6	kWh/a
EEC	A	
FDE	31,6	
FDEC	A	
LE	29,9	
LEC	A	
GFE	76,0	
GFEC	C	
Qmin	354,0	m³/h
Qmax	655,0	m³/h
Qboost	765,0	m³/h
SPEmin	48	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,28	W
PI		
F	0.9	
EEl	53,5	
Qbep	449,0	m³/h
Pbep	411	Pa
Qboost	765,0	m³/h
Wbep	162,0	W
WL	6,00	W
Emiddle	179	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.