

## STELLA

### Version

Slim motor 800 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122363295



## FEATURES

Perimeter suction  
Electronic control  
Metallic grease filter,  
removable and washable  
Remote control included  
Dynamic LED Light (2700K -  
5600K)  
Motor sold separately

Cut-out size: 505 x 940 mm

## OPTIONAL ACCESSORIES

**KACL.396**  
Ø200 - Flange  
**KACL.398**  
Ø150 - Flange  
**KACL.770#41F**  
Remote under-roof 1100 m<sup>3</sup>/h  
Brushless  
**KACL.782#49F**  
Slim motor 800 m<sup>3</sup>/h  
**KACL.786#41F**  
Outdoor extractor fan 1000  
m<sup>3</sup>/h  
**KACL.796#4AF**  
Outdoor extractor fan 1500 m<sup>3</sup>/h  
**KACL.797#4AF**  
Remote under-roof motor 1300  
m<sup>3</sup>/h  
**KACL.798#41F**  
Remote under-roof motor 950  
m<sup>3</sup>/h  
**KACL.928**  
Filters spare  
**KACL.931**  
Filters Carbon.Zeo - Spare  
**KACL.939#BF**  
Ceiling re-circulation filtering kit  
(only for Slim Motor)  
**KACL.953#BF**  
Carbon.Zeo vertical outlet  
ceiling filter unit kit

## TECHNICAL FEATURES

**Installation type**  
Ceiling  
**Dimensions**  
90 cm  
**Finishing**  
Scotch brite stainless steel (AISI  
304)  
**Type of control**  
Electronic control  
**Speed settings**  
4  
**Lighting**  
Led 4x3,6 W - 2700 K / 5600 K  
**Filter**  
2 x Metallic filter "Base" -  
290x326 mm  
**Maximum distance**  
Gas hob: 150 cm  
Electric hob: 150 cm

## PACKAGING:WEIGHTS AND VOLUMES

### STELLA Gross weight

24.6 kg

### Net weight

21.8 kg

### Volumes

0.14 m<sup>3</sup>

### Packaging size

Length

1120 mm

Height

190 mm

Depth

670 mm

### REMOTE MOTOR Slim motor

800 m<sup>3</sup>/h **Gross weight**

6.5 kg

### Net weight

5.2 kg

### Volumes

0.04 m<sup>3</sup>

### Packaging size

Length

575 mm

Height

195 mm

Depth

395 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

30 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

540 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

66 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


600 Pa

### Max. motor power

150 W

## ENERGY CLASS

B

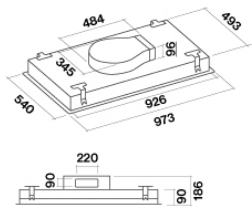

## STELLA

### Version

Slim motor 800 m<sup>3</sup>/h

### Collection

Design+


### EAN code

8034122363295

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Capacity (m <sup>3</sup> /h) I.E.C.61591	245	350	470	540
Maximum pressure (Pa)	400	480	530	600
Motor Power (W)	100	110	120	150
Air outlet	220x90	220x90	220x90	220x90

## CAPACITY / PRESSURE

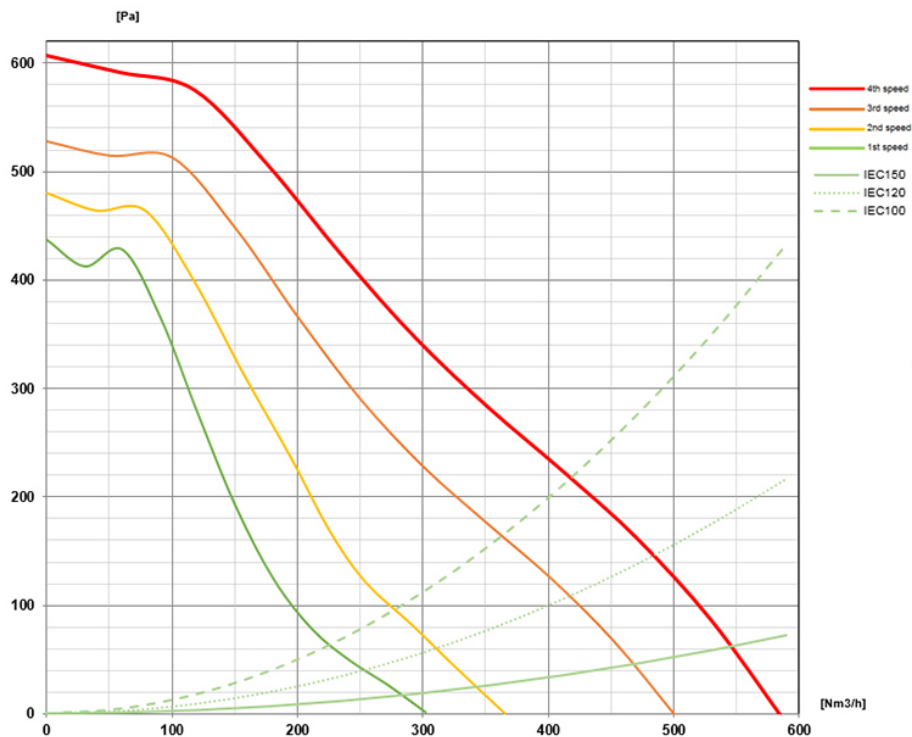

## STELLA

### Version

Slim motor 800 m<sup>3</sup>/h


### Collection

Design+

### EAN code

8034122363295

## ENERGY LABEL

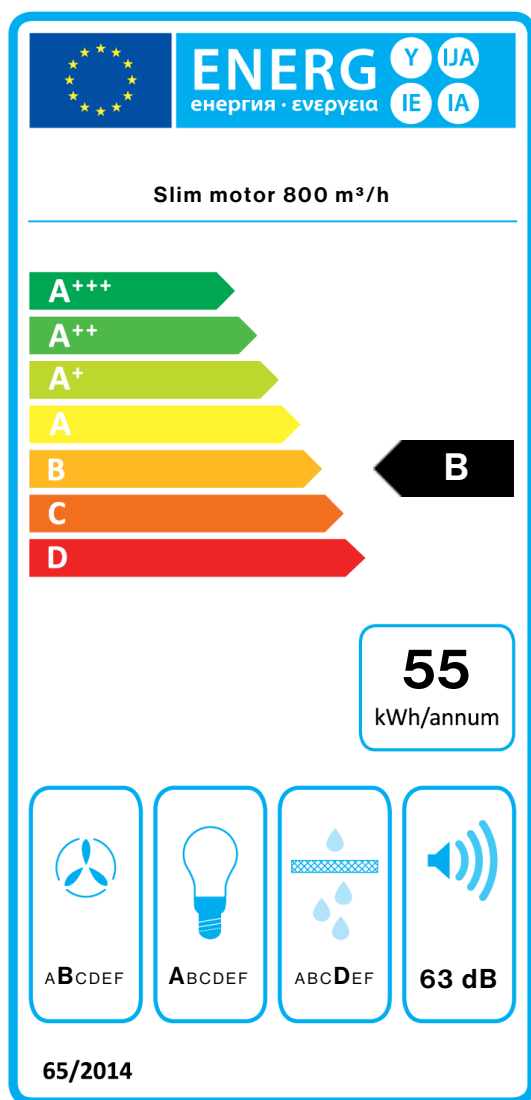

PF		
S	Falmec Spa	
M	Slim motor 800 m <sup>3</sup> /h	
AEC	55,2	kWh/a
EEC	B	
FDE	24,2	
FDEC	B	
LE	29,1	
LEC	A	
GFE	65,1	
GFEC	D	
Qmin	245,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	540,0	m <sup>3</sup> /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEL	65,0	
Qbep	332,0	m <sup>3</sup> /h
Pbep	297	Pa
Qboost	540,0	m <sup>3</sup> /h
Wbep	113,0	W
WL	13,50	W
Emiddle	309	lux
Lwa-SPEmax	63	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.