

STELLA

Version

Remote under-roof motor 950 m³/h

Collection

Design+

EAN code

8034122363288



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable and washable
Remote control included
Dynamic LED Light (2700K - 5600K)
Motor sold separately

Cut-out size: 505 x 940 mm

OPTIONAL ACCESSORIES

KACL.396
Ø200 - Flange

KACL.398
Ø150 - Flange

KACL.770#41F
Remote under-roof 1100 m³/h
Brushless

KACL.782#49F
Slim motor 800 m³/h

KACL.786#41F
Outdoor extractor fan 1000 m³/h

KACL.796#4AF
Outdoor extractor fan 1500 m³/h

KACL.797#4AF
Remote under-roof motor 1300 m³/h

KACL.798#41F
Remote under-roof motor 950 m³/h

KACL.928
Filters spare

KACL.931
Filters Carbon.Zeo - Spare

KACL.939#BF
Ceiling re-circulation filtering kit (only for Slim Motor)

KACL.953#BF
Carbon.Zeo vertical outlet ceiling filter unit kit

TECHNICAL FEATURES

Installation type
Ceiling

Dimensions
90 cm

Finishing
Painted white steel

Type of control
Electronic control

Speed settings
4

Lighting
Led 4x3,6 W - 2700 K / 5600 K

Filter
2 x Metallic filter "Base" - 290x326 mm

Maximum distance
Gas hob: 150 cm
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES

STELLA Gross weight

24.6 kg

Net weight

21.8 kg

Volumes

0.14 m³

Packaging size

Length

1120 mm

Height

190 mm

Depth

670 mm

REMOTE MOTOR Remote under-roof motor 950 m³/h

Gross weight

10 kg

Net weight

9 kg

Volumes

0.06 m³

Packaging size

Length

435 mm

Height

340 mm

Depth

385 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

30 W

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

695 m³/h

I.E.C. 61591

Maximum noise level

66 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)


590 Pa

Max. motor power

270 W

ENERGY CLASS

B

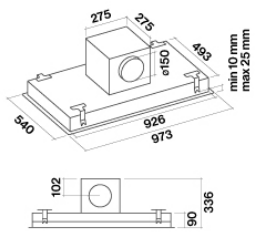

Stella Led 90 - under roof motor

STELLA

Version

Remote under-roof motor 950
m³/h

Collection

Design+


EAN code

8034122363288

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	48	56	62	66
Capacity (m ³ /h) I.E.C.61591	365	480	600	695
Maximum pressure (Pa)	510	520	560	590
Motor Power (W)	190	220	250	270
Air outlet	150	150	150	150

CAPACITY / PRESSURE

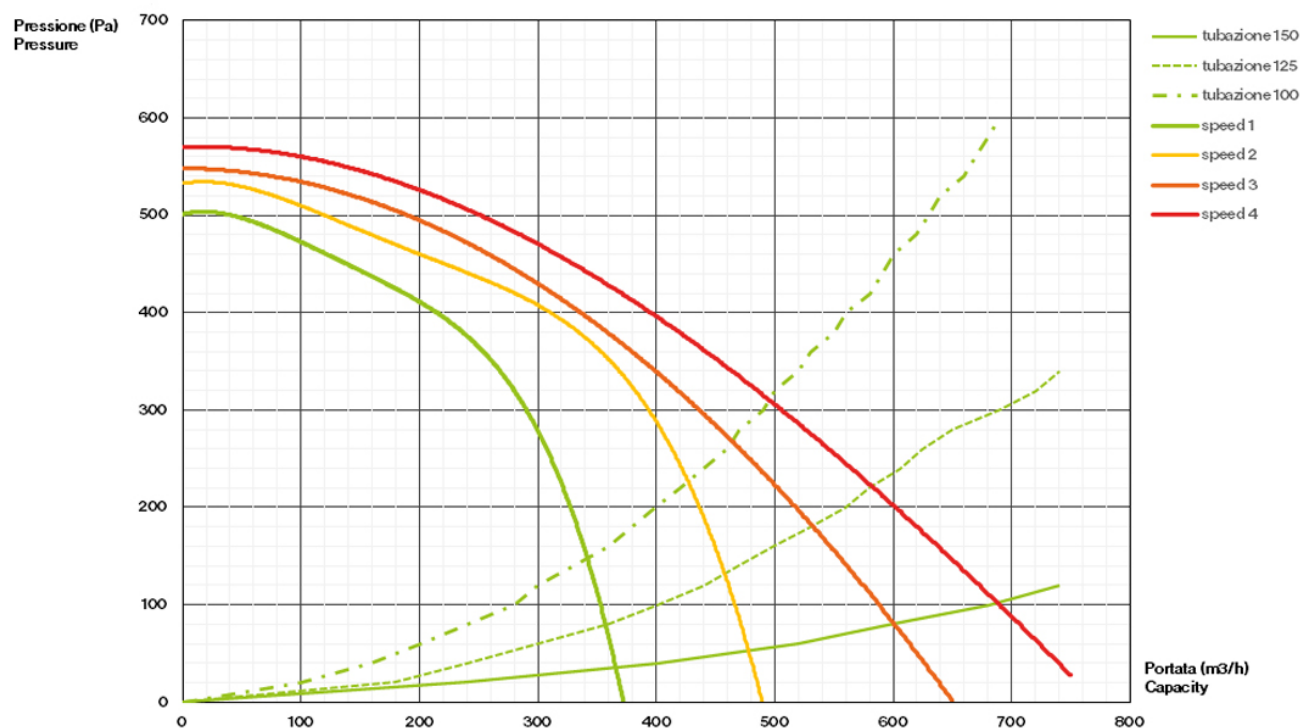

STELLA

Version

Remote under-roof motor 950
m³/h


Collection

Design+

EAN code

8034122363288

ENERGY LABEL

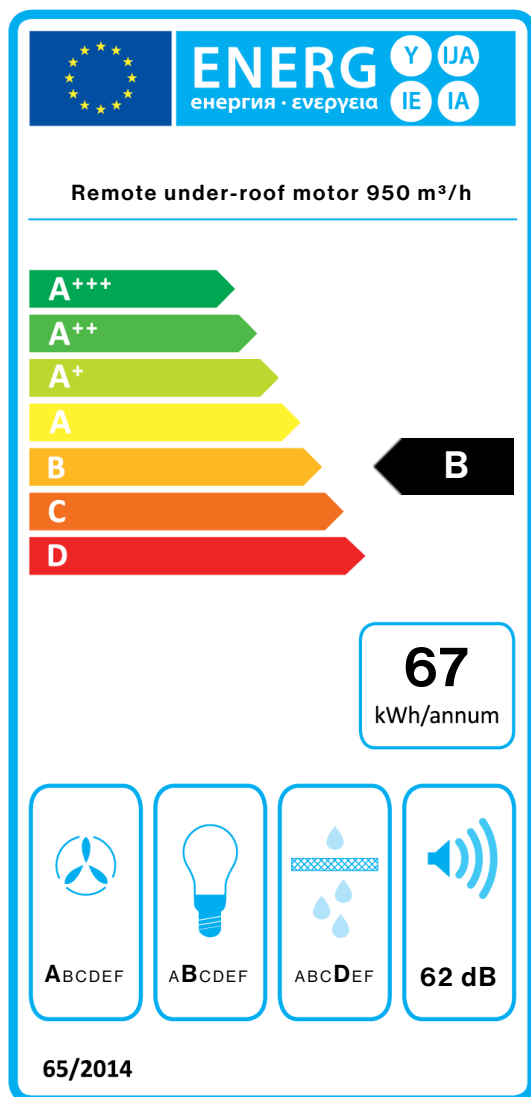

PF		
S	Falmec Spa	
M	Remote under-roof motor 950 m ³ /h	
AEC	67,2	kWh/a
EEC	B	
FDE	29,1	
FDEC	A	
LE	22,9	
LEC	B	
GFE	65,1	
GFEC	D	
Qmin	365,0	m ³ /h
Qmax	600,0	m ³ /h
Qboost	695,0	m ³ /h
SPEmin	48	dBa
SPEmax	62	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	61,6	
Qbep	384,0	m ³ /h
Pbep	414	Pa
Qboost	695,0	m ³ /h
Wbep	157,0	W
WL	13,50	W
Emiddle	309	lex
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.