

TAB

Version

Wall 60 cm - White - 800 m³/h

Designer

Collection

Design

EAN code

8034122352046



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Chrome edge
Electronic control
LED lighting on body and door
Top filter, removable and washable
Charcoal filter included
Possible to duct wall mounted from rear
Optional Chimney

RAL 9016 / Bianco opaco
The RAL codes have to be considered indicative since production process and materials may alter the colors.

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m³/h
Brushless

KACL.786#41F
Outdoor extractor fan 1000 m³/h

KACL.796#4AF
Outdoor extractor fan 1500 m³/h

KACL.797#4AF
Remote under-roof motor 1300 m³/h

KACL.798#41F
Remote under-roof motor 950 m³/h

KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)

KCTCN.001#B
KIT CHIMNEY TAB 60-80 NOR.
WHITE

TECHNICAL FEATURES

Installation type
Wall

Dimensions
60 cm

Finishing
White opening frontal
Chrome edge

Motor
800 m³/h

Type of control
Electronic control

Speed settings
4

Lighting
Led 4x1,2 W - 3200 K

Filter
Metallic filter "Top"

Charcoal filter
Round charcoal filter Ø170 mm - Type 6 (included)

Minimum distance
Gas hob: 55 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
20 kg

Net weight
17 kg

Volumes
0.2 m³

Packaging size
Length
710 mm
Height
480 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W

Voltage
220-240V

Frequency
50-60Hz

Plug type
Shuko

MOTOR TECHNICAL SHEET



Maximum capacity
750 m³/h
I.E.C. 61591

Maximum noise level
66 dB(A)re1pW
I.E.C.60704-2-13

Maximum pressure (Pa)
510 Pa

Max. motor power
224 W

ENERGY CLASS
A



TAB

Version

Wall 60 cm - White - 800 m³/h

Designer

Collection

Design


EAN code

8034122352046

MOTOR TECHNICAL SHEET

| Motor speed | 1 | 2 | 3 | 4 |
|--|-----|-----|-----|-----|
| Noise level dB(A) _{re1pW-I.E.C.60704-2-13} | 46 | 53 | 58 | 66 |
| Capacity (m ³ /h) I.E.C.61591 | 295 | 390 | 500 | 750 |
| Maximum pressure (Pa) | 390 | 440 | 490 | 510 |
| Motor Power (W) | 130 | 150 | 178 | 224 |
| Air outlet | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE

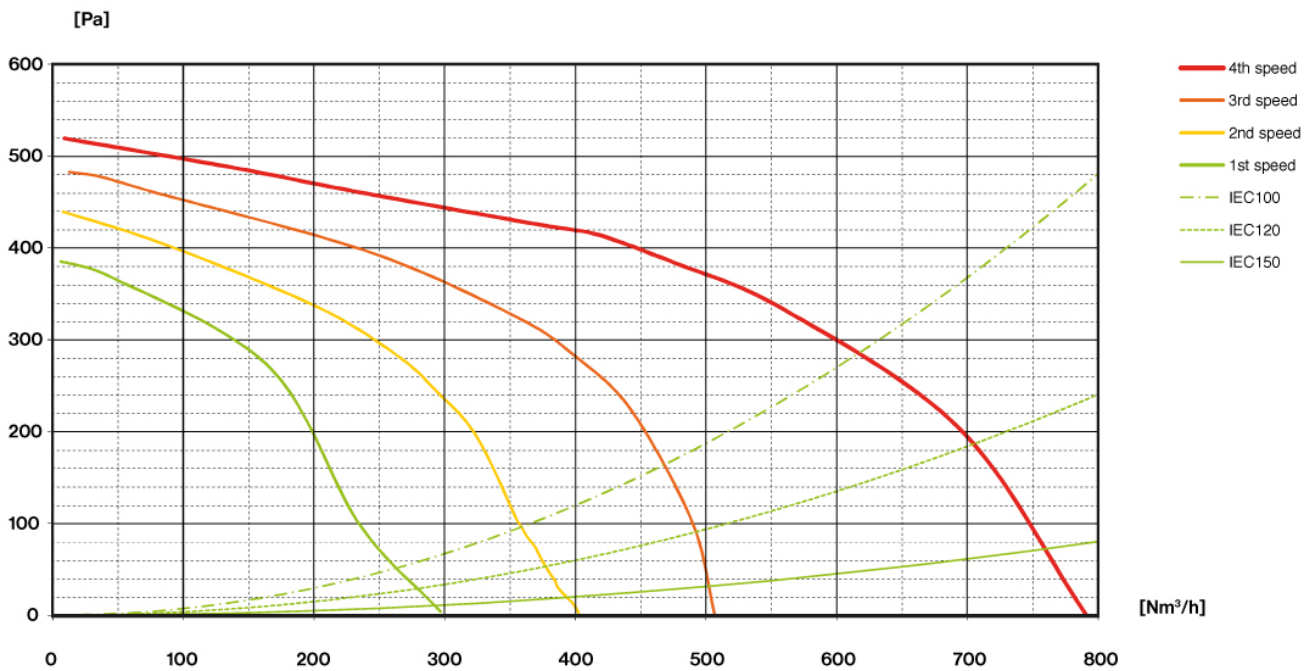

TAB

Version

Wall 60 cm - White - 800 m3/h

Designer


Collection

Design

EAN code

8034122352046

ENERGY LABEL

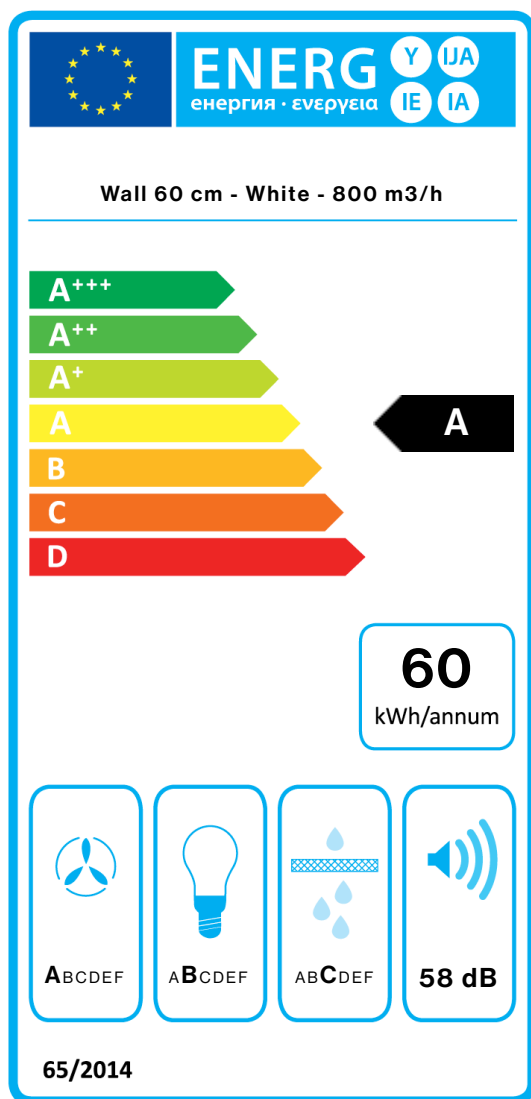

| PF | | |
|------------|-------------------------------|-------------------|
| S | Falmec Spa | |
| M | Wall 60 cm - White - 800 m3/h | |
| AEC | 60,2 | kWh/a |
| EEC | A | |
| FDE | 29,8 | |
| FDEC | A | |
| LE | 24,9 | |
| LEC | B | |
| GFE | 82,0 | |
| GFEC | C | |
| Qmin | 295,0 | m ³ /h |
| Qmax | 500,0 | m ³ /h |
| Qboost | 750,0 | m ³ /h |
| SPEmin | 46 | dBa |
| SPEmax | 58 | dBa |
| SPEboost | 66 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 0.9 | |
| EEL | 54,6 | |
| Qbep | 432,0 | m ³ /h |
| Pbep | 407 | Pa |
| Qboost | 750,0 | m ³ /h |
| Wbep | 164,0 | W |
| WL | 8,60 | W |
| Emiddle | 214 | lux |
| Lwa-SPEmax | 58 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency class / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.