

## GRUPPO INCASSO PLUS GREEN TECH

### Version

Plus Green Tech - Built-in 50  
cm - Inox - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122367286



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

Perimeter suction  
Electronic control  
Metallic grease filter,  
removable and washable  
Optional charcoal filter  
Remote control (optional)  
Dimmable led lighting  
Dynamic LED Light (2700K -  
5600K)  
Green Tech Motor  
Dialogue system with auto  
mode

## OPTIONAL ACCESSORIES

### 103050091

Round charcoal filter Ø170 mm -  
Type 6

### 105080053

Remote control

## TECHNICAL FEATURES


**Installation type**  
Built-in  
**Dimensions**  
50 cm  
**Finishing**  
Scotch brite stainless steel (AISI  
430)  
**Motor**  
800 m<sup>3</sup>/h  
**Type of control**  
Electronic control  
**Speed settings**  
4  
**Lighting**  
Led 2x1,7 W - 2700 K / 5600 K  
**Minimum distance**  
Gas hob: 62 cm  
Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

**Gross weight**  
9.5 kg  
**Net weight**  
7.6 kg  
**Volumes**  
0.09 m<sup>3</sup>  
**Packaging size**  
Length  
610 mm  
Height  
380 mm  
Depth  
375 mm

## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
280 W  
**Voltage**  
220-240V  
**Frequency**  
50-60Hz  
**ENERGY CLASS**  
A+



## GRUPPO INCASSO PLUS GREEN TECH

### Version

Plus Green Tech - Built-in 50  
cm - Inox - 800 m3/h


### Collection

Design

### EAN code

8034122367286

## ENERGY LABEL

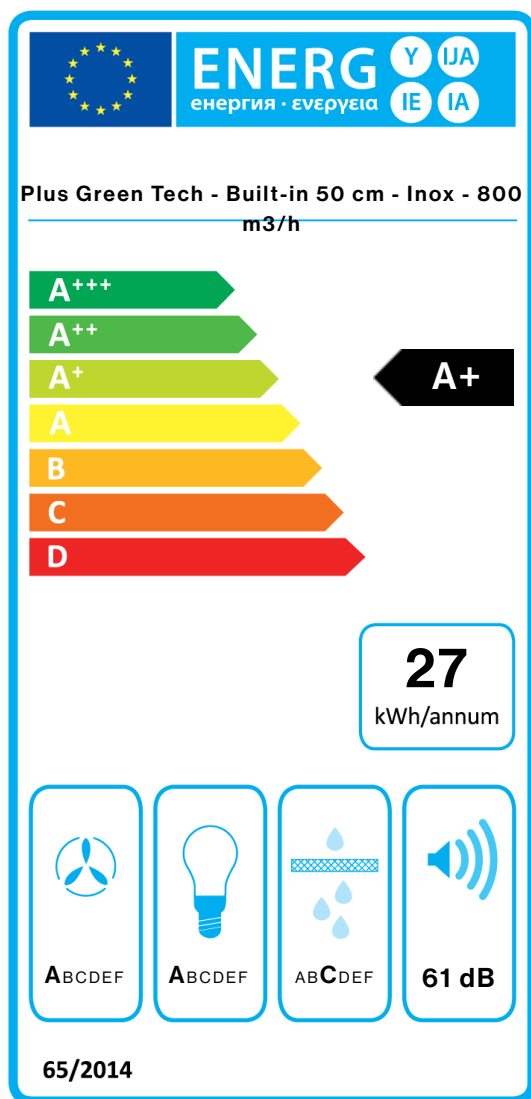

PF		
S	Falmec Spa	
M	Plus Green Tech - Built-in 50 cm - Inox - 800 m3/h	
AEC	26,6	kWh/a
EEC	A+	
FDE	36,5	
FDEC	A	
LE	32,9	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	205,0	m <sup>3</sup> /h
Qmax	500,0	m <sup>3</sup> /h
Qboost	620,0	m <sup>3</sup> /h
SPEmin	47	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,28	W
PI		
F	0.7	
EEL	38,6	
Qbep	353,0	m <sup>3</sup> /h
Pbep	350	Pa
Qboost	620,0	m <sup>3</sup> /h
Wbep	94,0	W
WL	3,50	W
Emiddle	115	lux
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.