

MIRA PLUS

Version

Plus - Island - 40 cm - Black -
800 m³/h

Collection

Design

EAN code

8034122368399



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable and washable
Charcoal filter (optional)
Dimmable lighting
Dynamic Light (2700K - 5600K)

From 02.09.2024 lighting is dynamic and dimmable while the carbon filter 103050091 is optional.

OPTIONAL ACCESSORIES

KACL.866

Air flow conveyer for recirculation versions (Island)

103050091

Round charcoal filter Ø170 mm - Type 6

TECHNICAL FEATURES


Installation type
Wall
Dimensions
40 cm
Finishing
Painted black steel
Motor
800 m³/h
Type of control
Electronic control
Speed
3 + boost
Lighting
Led stripe
Minimum distance
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
36 kg
Net weight
32 kg
Volumes
0.28 m³
Packaging size
Length
995 mm
Height
480 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
ENERGY CLASS
B



MIRA PLUS

Version

Plus - Island - 40 cm - Black -
800 m³/h


Collection

Design

EAN code

8034122368399

ENERGY LABEL

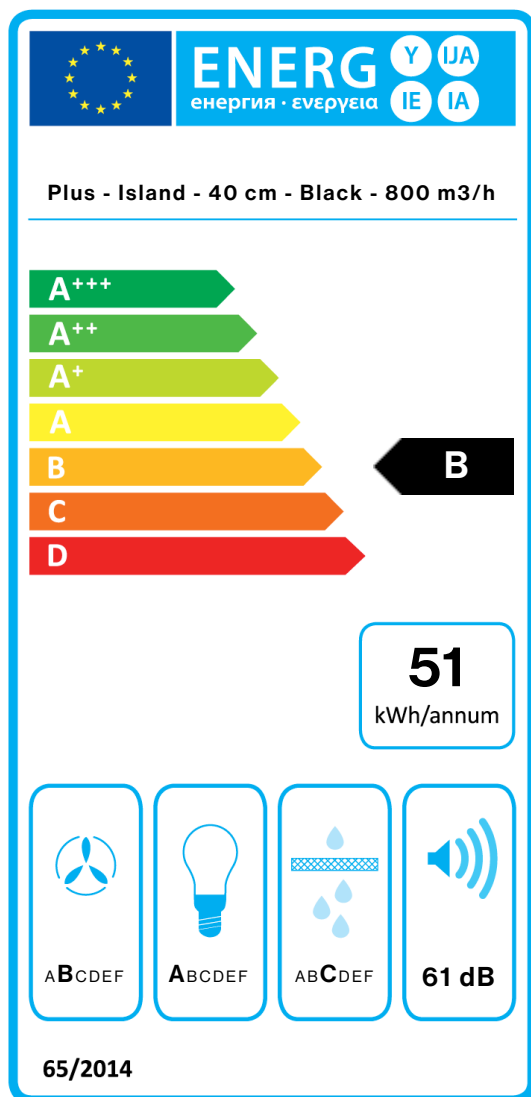

PF		
S	Falmec Spa	
M	Plus - Island - 40 cm - Black - 800 m ³ /h	
AEC	51,1	kWh/a
EEC	B	
FDE	27,0	
FDEC	B	
LE	29,9	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	264,0	m ³ /h
Qmax	476,0	m ³ /h
Qboost	570,0	m ³ /h
SPEmin	50	dBa
SPEmax	61	dBa
SPEboost	64	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	57,7	
Qbep	324,0	m ³ /h
Pbep	378	Pa
Qboost	570,0	m ³ /h
Wbep	126,0	W
WL	7,00	W
Emiddle	210	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.