

## PIANO - SINGLE INLET

### Version

Worktop - Single inlet

### Collection

Cooking systems

### EAN code

8034122354859



The photograph is purely for information  
It may not correspond to the selected version.

## FEATURES

### Touch control

Optional combined regenerable

Carbon.Zeo filter

Piano can be installed only with electric hobs.

## OPTIONAL ACCESSORIES

### KACL.345

Double horizontal elbow

### KACL.701#41F

Motor 1000 m3/h

### KACL.760

Junction for Piano with one inlet and left outlet

### KACL.761

Deeper junction for Piano with one inlet and under cabinet motor with right outlet.

### KACL.770#41F

Remote under-roof 1100 m3/h

Brushless

### KACL.786#41F

Outdoor extractor fan 1000 m3/h

### KACL.796#4AF

Outdoor extractor fan 1500 m3/h

### KACL.797#4AF

Remote under-roof motor 1300 m3/h

### KACL.798#41F

Remote under-roof motor 950 m3/h

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

### KACL.938

Kit filter Carbon.Zeo + grid

### KACL.945

Underbase Carbon.Zeo

"Compact" filtering unit H10 cm

### KACL.946

Underbase Carbon.Zeo

"Compact" filtering unit - Spare

## TECHNICAL FEATURES

### Installation type

Worktop

### Dimensions

13x53 cm

### Finishing

Scotch brite stainless steel (AISI 304)

### Type of control

Touch control

### Speed settings

4

### Charcoal filter

Kit filter Carbon.Zeo + grid (optional)

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

18.5 kg

### Net weight

15 kg

### Volumes

0.14 m<sup>3</sup>

### Packaging size

Length

710 mm

Height

340 mm

Depth

595 mm

## CONSUMPTION AND CONNECTION FEATURES

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

### ENERGY CLASS

B

## PIANO - SINGLE INLET

### Version

Worktop - Single inlet


### Collection

Cooking systems

### EAN code

8034122354859

## ENERGY LABEL

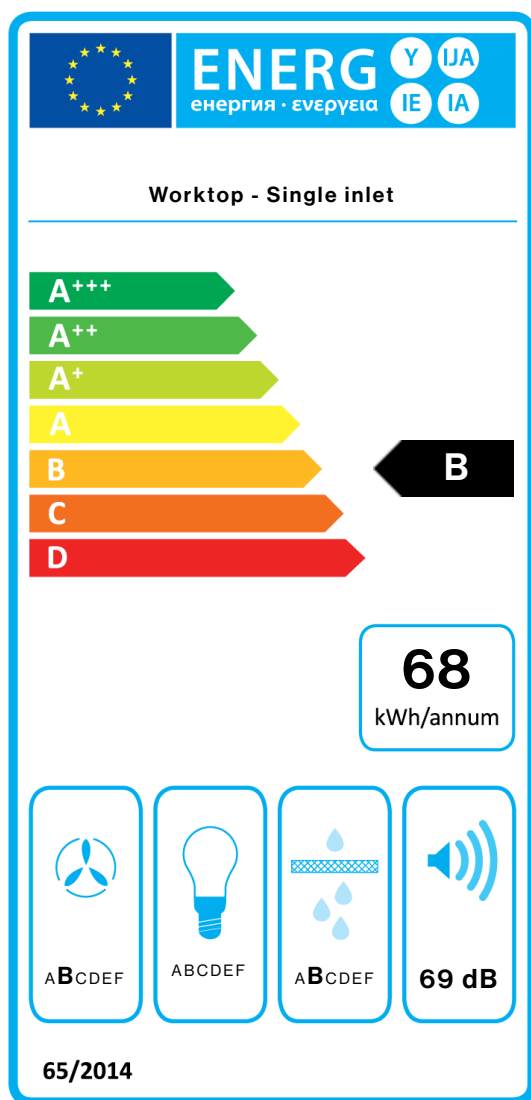

PF		
S	Falmec Spa	
M	Worktop - Single inlet	
AEC	67,5	kWh/a
EEC	B	
FDE	23,2	
FDEC	B	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	390,0	m <sup>3</sup> /h
Qmax	510,0	m <sup>3</sup> /h
Qboost	560,0	m <sup>3</sup> /h
SPEmin	62	dBa
SPEmax	69	dBa
SPEboost	71	dBa
PO	-	W
PS	0,48	W
PI		
F	1.2	
EEL	67,5	
Qbep	284,0	m <sup>3</sup> /h
Pbep	453	Pa
Qboost	560,0	m <sup>3</sup> /h
Wbep	154,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	69	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.