

PARALLEL

Version

Built-in 76 cm - white - 800 m³/h

Collection

Design

EAN code

8034122366319



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Electronic control
Combined regenerable
Carbon.Zeo filter (optional)
Remote control included
Dynamic LED Light (2700K - 5600K)
Dialogue system with auto mode

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m³/h
Brushless

KACL.782#49F
Slim motor 800 m³/h

KACL.786#41F
Outdoor extractor fan 1000 m³/h

KACL.796#4AF
Outdoor extractor fan 1500 m³/h

KACL.797#4AF
Remote under-roof motor 1300 m³/h

KACL.798#41F
Remote under-roof motor 950 m³/h

KACL.961
Charcoal and Zeolite filter
105080053
Remote control

TECHNICAL FEATURES

Installation type
Built-in

Dimensions
76 cm

Finishing
Painted white steel
Tempered glass with white finishing

Motor
800 m³/h

Type of control
Electronic control

Speed settings
4

Lighting
Strip Led - 2700 K / 5600 K

Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
17.6 kg

Net weight
9.4 kg

Volumes
0.12 m³

Packaging size
Length
995 mm
Height
410 mm
Depth
465 mm



CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W

Voltage
220-240V

Frequency
50-60Hz

ENERGY CLASS
B



PARALLEL

Version

Built-in 76 cm - white - 800 m3/h


Collection

Design

EAN code

8034122366319

ENERGY LABEL

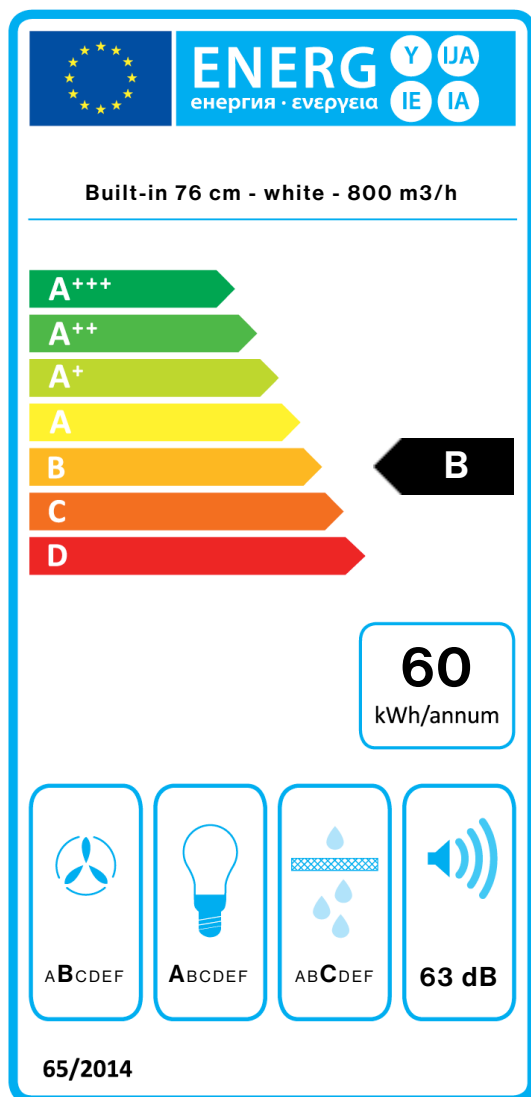

PF		
S	Falmec Spa	
M	Built-in 76 cm - white - 800 m3/h	
AEC	59,5	kWh/a
EEC	B	
FDE	27,5	
FDEC	B	
LE	38,1	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	280,0	m ³ /h
Qmax	548,0	m ³ /h
Qboost	638,0	m ³ /h
SPEmin	50	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	1	
EEl	60,5	
Qbep	359,0	m ³ /h
Pbep	384	Pa
Qboost	638,0	m ³ /h
Wbep	139,0	W
WL	12,00	W
Emiddle	457	lex
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.