

VERSO

Version

Wall - 55 cm - Black - 800 m³/h

Designer

Collection

Design

EAN code

8034122368634



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

Tempered glass
Touch control + 24 h function
Metallic grease filter, removable and washable
Combined regenerable
Carbon.Zeo filter (optional)
Charcoal filter (optional)
Remote control (optional)
Possible to duct wall mounted from rear
Optional Chimney
Dimmable lighting
Dynamic Light (2700K - 5600K)
Dialogue system with auto mode

From 02.09.2024 the Dialogue System control and dimmable light are included while the carbon filter 103050091 is optional.

OPTIONAL ACCESSORIES

103050091

Round charcoal filter Ø170 mm - Type 6

105080053

Remote control

KACL.865

Air flow conveyer for recirculation version (Wall)

KACL.941

External Carbon.Zeo filter unit for sloped hoods

KACL.958#NF

External Carbon.Zeo filter unit for sloped hoods (Black)

KCQAN.00#N

Optional chimney - Black

TECHNICAL FEATURES





Installation type
Wall
Dimensions
55 cm
Finishing
Black tempered glass
Motor
800 m³/h
Type of control
Touch control
Speed
3 + boost
Lighting
Led 2x1,2 W - 2700 K / 5600 K
Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
20.3 kg
Net weight
16.2 kg
Volumes
0.19 m³
Packaging size
Length
710 mm
Height
450 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
ENERGY CLASS
A



VERSO

Version

Wall - 55 cm - Black - 800 m3/h

Designer


Collection

Design

EAN code

8034122368634

ENERGY LABEL

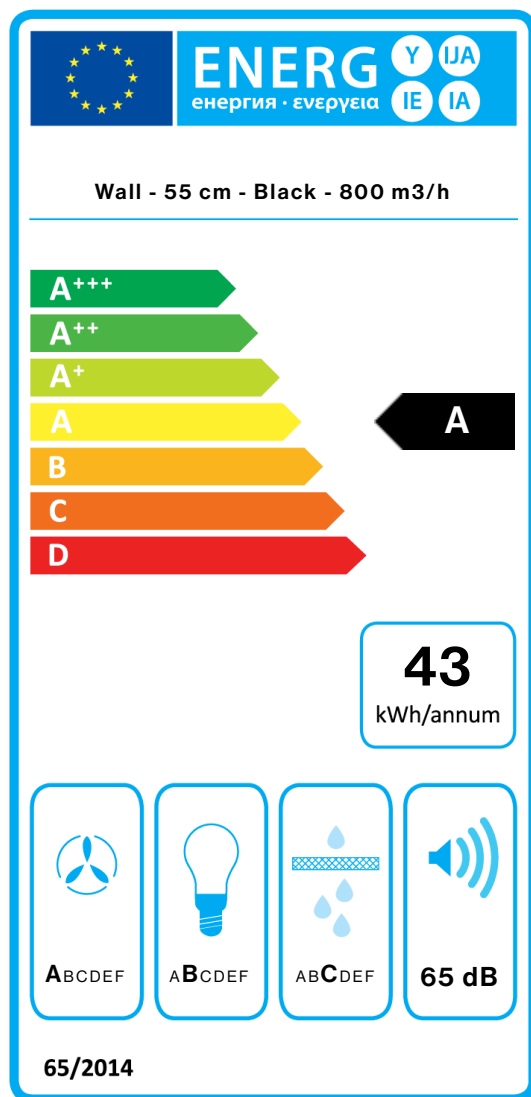

PF		
S	Falmec Spa	
M	Wall - 55 cm - Black - 800 m3/h	
AEC	43,0	kWh/a
EEC	A	
FDE	33,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	299,0	m ³ /h
Qmax	584,0	m ³ /h
Qboost	708,0	m ³ /h
SPEmin	50	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.8	
EEl	46,8	
Qbep	429,0	m ³ /h
Pbep	375	Pa
Qboost	708,0	m ³ /h
Wbep	134,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.