

## VERSO

### Version

Wall - 85 cm - White - 800 m<sup>3</sup>/h

### Designer

### Collection

Design

### EAN code

8034122368658

## FEATURES

Tempered glass  
 Touch control + 24 h function  
 Metallic grease filter, removable and washable  
 Combined regenerable  
 Carbon.Zeo filter (optional)  
 Charcoal filter (optional)  
 Remote control (optional)  
 Possible to duct wall mounted from rear  
 Optional Chimney  
 Dimmable lighting  
 Dynamic Light (2700K - 5600K)  
 Dialogue system with auto mode

From 02.09.2024 the Dialogue System control and dimmable light are included while the carbon filter 103050091 is optional.

## OPTIONAL ACCESSORIES

### 103050091

Round charcoal filter Ø170 mm - Type 6

### 105080053

Remote control

### KACL.865

Air flow conveyer for recirculation version (Wall)

### KACL.941

External Carbon.Zeo filter unit for sloped hoods

### KCQAN.00#B

Optional chimney - White

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

85 cm

### Finishing

White tempered glass

### Motor

800 m<sup>3</sup>/h

### Type of control

Touch control

### Speed

3 + boost

### Lighting

Led 2x1,2 W - 2700 K / 5600 K

### Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm



Photograph is for information purposes only  
 It may not correspond to the selected version.

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

23.8 kg

### Net weight

18.7 kg

### Volumes

0.27 m<sup>3</sup>

### Packaging size

Length

995 mm

Height

450 mm

Depth

595 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage





220-240V

### Frequency

50-60Hz

### ENERGY CLASS

A



## VERSO

### Version

Wall - 85 cm - White - 800 m3/h

### Designer


### Collection

Design

### EAN code

8034122368658

## ENERGY LABEL

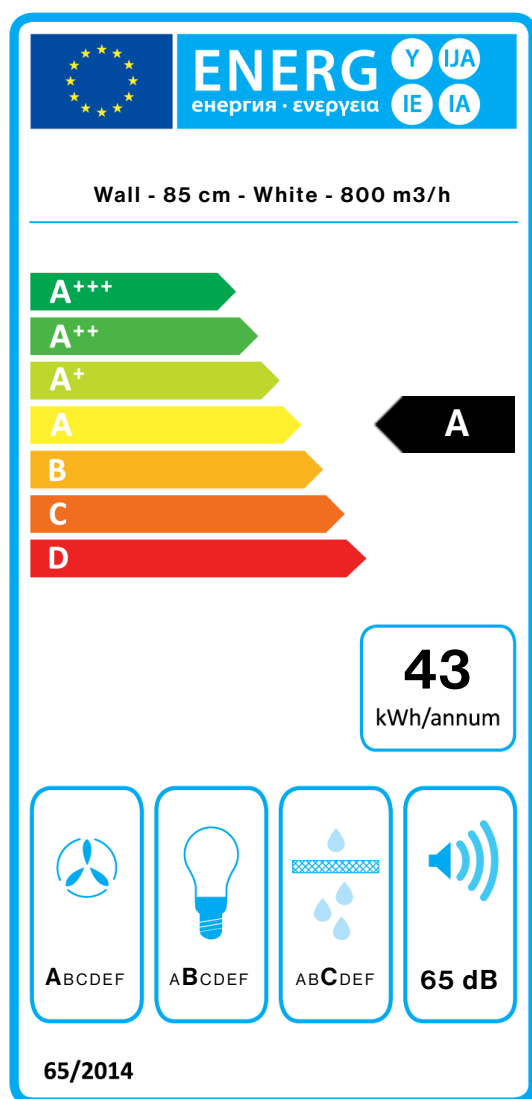

PF		
S	Falmec Spa	
M	Wall - 85 cm - White - 800 m3/h	
AEC	43,0	kWh/a
EEC	A	
FDE	33,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	299,0	m <sup>3</sup> /h
Qmax	584,0	m <sup>3</sup> /h
Qboost	708,0	m <sup>3</sup> /h
SPEmin	50	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0,8	
EEl	46,8	
Qbep	429,0	m <sup>3</sup> /h
Pbep	375	Pa
Qboost	708,0	m <sup>3</sup> /h
Wbep	134,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	65	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point /

Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.