

VERSO EASY

Version

EASY - White - 85 cm - 800 m³/h

Collection

Design

EAN code

8034122365633



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Touch control + 24 h function
Combined Carbon.Zeo filter, regenable
Optional remote control
Opening frontal
Dynamic LED Light (2700K - 5600K)
Double suction area (frontal and lower)
Dialogue system with auto mode

OPTIONAL ACCESSORIES

KACL.967

Pair of regenerable Carbon.Zeo filters

105080053

Remote control

TECHNICAL FEATURES

Installation type

Wall

Dimensions

85 cm

Finishing

Painted steel
 White tempered glass

Motor

800 m³/h

Type of control

Touch control

Speed settings

4

Lighting

Led 2x1,2 W - 2700 K / 5600 K

Charcoal filter

Pair of regenerable Carbon.Zeo filters (included)

Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

22.6 kg

Net weight

17.9 kg

Volumes

0.27 m³

Packaging size

Length

995 mm

Height

450 mm

Depth

595 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage



220-240V

Frequency

50-60Hz

ENERGY CLASS

A



VERSO EASY

Version

EASY - White - 85 cm - 800 m3/h


Collection

Design

EAN code

8034122365633

ENERGY LABEL

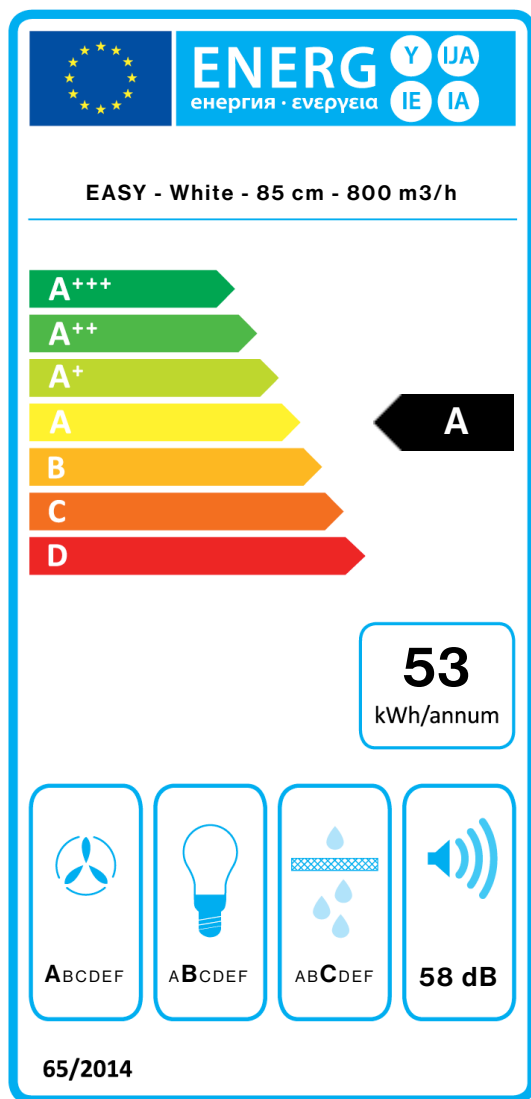

PF		
S	Falmec Spa	
M	EASY - White - 85 cm - 800 m3/h	
AEC	53,1	kWh/a
EEC	A	
FDE	31,6	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	295,0	m³/h
Qmax	500,0	m³/h
Qboost	750,0	m³/h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	52,7	
Qbep	440,0	m³/h
Pbep	388	Pa
Qboost	750,0	m³/h
Wbep	150,0	W
WL	5,30	W
Emiddle	114	lex
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.