

## VERSO EASY

### Version

EASY - Black - 85 cm - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122365640



## FEATURES

**Touch control + 24 h function**  
**Combined Carbon.Zeo filter, regenable**  
**Optional remote control**  
**Opening frontal**  
**Dynamic LED Light (2700K - 5600K)**  
**Double suction area (frontal and lower)**  
**Dialogue system with auto mode**


## OPTIONAL ACCESSORIES

### KACL.967

Pair of regenerable Carbon.Zeo filters

### 105080053

Remote control



## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

85 cm

### Finishing

Painted steel  
 Black tempered glass

### Motor

800 m<sup>3</sup>/h

### Type of control

Touch control

### Speed settings

4

### Lighting


Led 2x1,2 W - 2700 K / 5600 K

### Charcoal filter

Pair of regenerable Carbon.Zeo filters (included)

### Minimum distance

Gas hob: 52 cm  
 Electric hob: 52 cm



## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

22.6 kg

### Net weight

17.9 kg

### Volumes

0.27 m<sup>3</sup>

### Packaging size

Length 995 mm  
 Height 450 mm  
 Depth 595 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

### ENERGY CLASS

A

## VERSO EASY

### Version

EASY - Black - 85 cm - 800 m3/h


### Collection

Design

### EAN code

8034122365640

## ENERGY LABEL

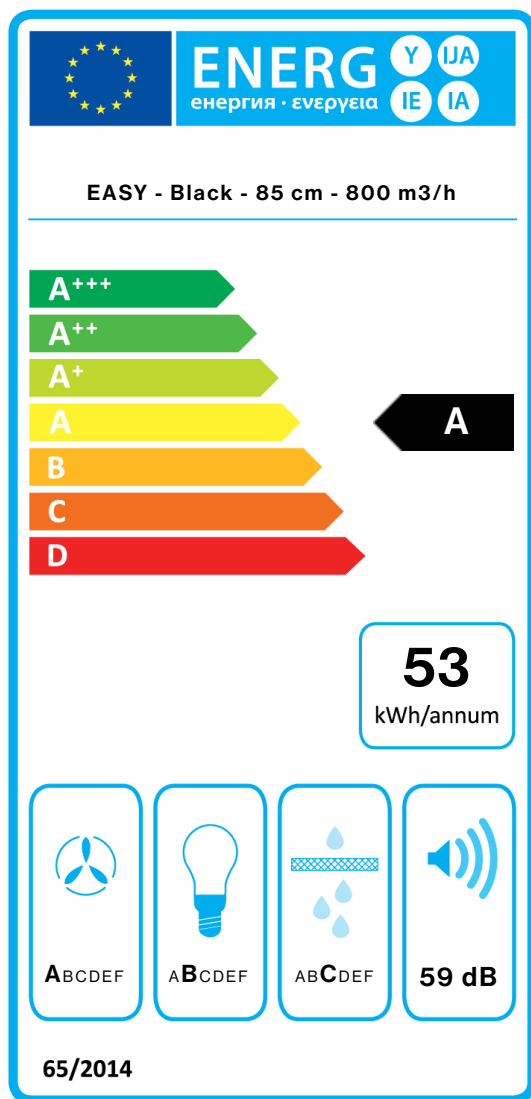

PF		
S	Falmec Spa	
M	EASY - Black - 85 cm - 800 m3/h	
AEC	53,1	kWh/a
EEC	A	
FDE	31,6	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	295,0	m³/h
Qmax	590,0	m³/h
Qboost	750,0	m³/h
SPEmin	46	dBa
SPEmax	59	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	52,7	
Qbep	440,0	m³/h
Pbep	388	Pa
Qboost	750,0	m³/h
Wbep	150,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	59	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.