

Version	Plus - Built-in - 80 cm - Inox - 950 m ³ /h
Design	Falmec Lab
Collection	Professional
TECHNICAL FEATURES	
Materials/Finishes	Scotch brite stainless steel (AISI 304)
Features	Professional Baffle filters with liquid collector
Control	Electronic control Remote control (optional) Dialogue system
Function	Extracting/Filtering
Lighting	Dimmable lighting Dynamic Light (2700K - 5600K) Strip LED 2x1,8 W - 2700 K / 5600 K
Filters	Professional Baffle Filters
Dimensions	80 cm
Minimum Electric hob distance	52 cm
Minimum Gas hob distance	60 cm



Photograph is for information purposes only. May not correspond to the selected version

CONNECTION AND CONSUMPTION FUNCTIONS


Maximum consumption	320 W
Voltage/Frequency	220-240V 50-60Hz

MOTOR

Motor	950 m ³ /h
Maximum capacity	860 m ³ /h I.E.C.61591
Maximum sound level	64 dB (A)re1pW I.E.C. 60704-2-13
Energy class	A

WEIGHTS AND VOLUMES

Gross weight	16 kg
Net weight	13 kg
Volume	0.17 m ³
Packaging dimensions	L 950 x H 442 x P 395 mm

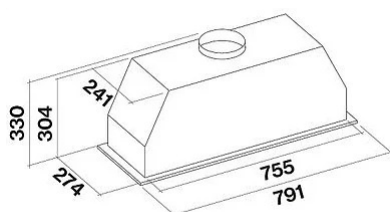

Optional accessories

Code	Description
105080053	Remote control


Optional accessories


<i>Code</i>	<i>Description</i>
KACL.1059	Conveyer for air outlet (Ø150)

ENGINE SPECIFICATIONS

Motor speed	1	2	3	4
Noise dB(A) re1pW I.E.C. 60704-2-13	53	58	64	69
Capacity	350	470	620	860
Maximum pressure (Pa)	500	540	560	600
Motor power (W)	185	215	240	260
Air outlet	150	150	150	150

FLOW RATE / PRESSURE

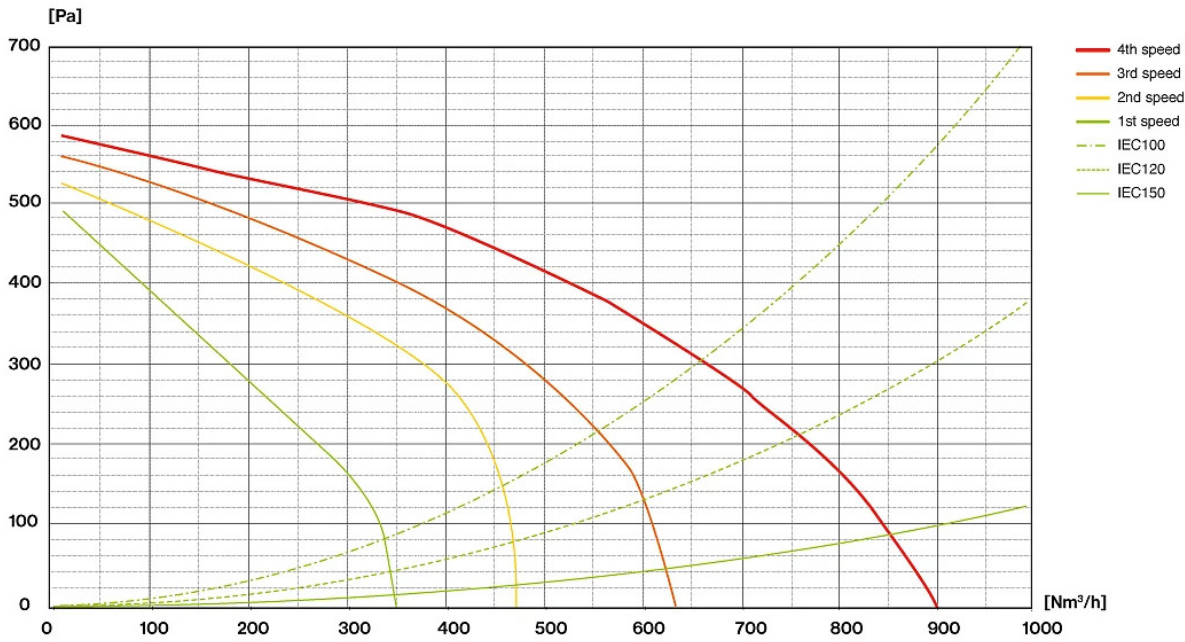

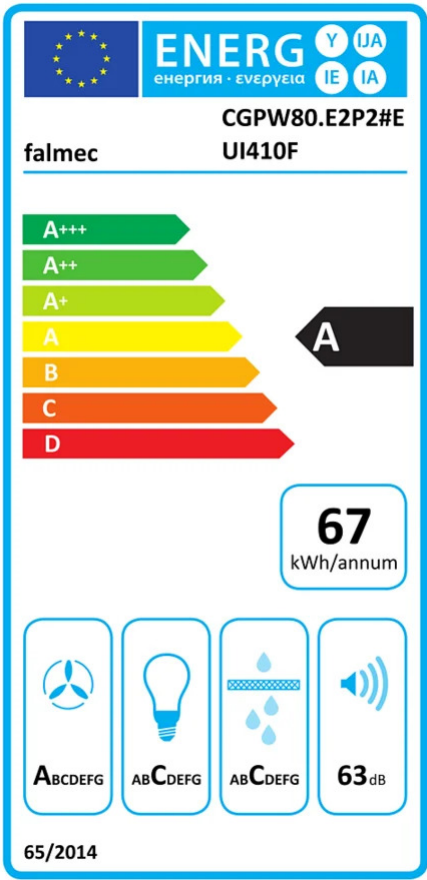

PF		
S	Falmecc Lab	
M	Plus - Built-in - 80 cm - Inox - 950 m3/h	
AEC	67.3	kWh/a
EEC	A	
FDE	29.3	
FDEC	A	
LE	18	
LEC	C	
GFE	74	
GFEC	C	
Qmin	350	m³ /h
Qmax	620	m³ /h
Qboost	860	m³ /h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	70	dBa
PO	0	W
PS	0.28	W
PI		
F	0.9	
EEL	53.8	
Qbep	473	m³ /h
Pbep	435	Pa
Qboost	860	m³ /h
Wbep	195	W
WL	4.5	W
Emiddle	81	lux
Lwa-SPEmax	63	dBa

PF_Scheda prodotto conforme a 65/2014 S_Vendor name / M_Project identification / AEC_Yearly energy consumption (AEC) hood / EEC_Energy efficiency class / FDE_Fluid dynamic efficiency (FDE) hood / FDEC_Fluid dynamic efficiency class / LE_Light efficiency (LE) hood / LEC_Light efficiency class of luminous efficiency / GFE_Fat filtration efficiency / GFEC_Fat filtration efficiency class / Qmin_Airflow (in m³/h) at minimum power under normal use conditions / Qmax_Airflow (in m³/h) at maximum power under normal use conditions / Qboost_Airflow (in m³/h) at the intensive power / SPEmin_A-weighted sound power of airborne noise emissions at the minimum power under normal use conditions / SPEmax_A-weighted sound power of airborne noise emissions at the maximum power under normal use conditions / SPEboost_A-weighted sound power of airborne noise emissions under intensive or boost use conditions / P0_CPower consumption in off mode (Po) / Ps_CPower consumption in standby mode (Ps).

PI_Additional information in accordance with 66/2014 4 F_Fattore di incremento nel tempo / EEL_Indice di efficienza energetica / Qbep_Velocità del flusso d'aria misurato nel punto di efficienza migliore / Pbep_Pressione dell'aria misurata nel punto di efficienza migliore / Qboost_Flusso d'aria massimo / Wbep_Ingresso energia elettrica misurato nel punto di efficienza migliore / WL_Potenza nominale del sistema luminoso / Emiddle_Illuminazione media del sistema luminoso sulla superficie di cottura / Lwa=SPEmax_Livello di pressione sonora alla potenza massima.