

## NUBE

### Version

Slim motor 800 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122363233



Photograph is for information purposes only  
It may not correspond to the selected version.

## FEATURES

Perimeter suction  
Electronic control  
Metallic grease filter,  
removable and washable  
Combined regenerable  
Carbon.Zeo filter (optional)  
Remote control included  
Motor sold separately  
Dialogue system with auto  
mode

Cut-out size: 505 x 940 mm

## OPTIONAL ACCESSORIES

### KACL.396

Flange - Ø200

### KACL.398

Flange - Ø150

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h

Brushless

### KACL.782#49F

Slim motor 800 m<sup>3</sup>/h

### KACL.786#41F

Outdoor extractor fan 1000

m<sup>3</sup>/h

### KACL.789

Junction for ceiling hoods

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300

m<sup>3</sup>/h

### KACL.798#41F

Remote under-roof motor 950

m<sup>3</sup>/h

### KACL.928

Filters spare

### KACL.931

Filters Carbon.Zeo - Spare

### KACL.939#BF

Ceiling re-circulation filtering kit  
(only for Slim Motor)

### KACL.953#BF

Carbon.Zeo vertical outlet  
ceiling filter unit kit

## TECHNICAL FEATURES

### Installation type

Ceiling

### Dimensions

90 cm

### Finishing

Scotch brite stainless steel (AISI  
304)

### Type of control

Electronic control

### Speed settings

3 + boost

### Filter

3 x Metallic filter "Base" -

290x267 mm

### Maximum distance

Gas hob: 150 cm

Electric hob: 150 cm

## PACKAGING:WEIGHTS AND VOLUMES

### NUBE Gross weight

25.6 kg

### Net weight

22.8 kg

### Volumes

0.14 m<sup>3</sup>

### Packaging size

Length

1120 mm

Height

190 mm

Depth

670 mm

### REMOTE MOTOR Slim motor

800 m<sup>3</sup>/h **Gross weight**

6.5 kg

### Net weight

5.2 kg

### Volumes

0.04 m<sup>3</sup>

### Packaging size

Length

575 mm

Height

195 mm

Depth

395 mm

## CONSUMPTION AND CONNECTION FEATURES

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

540 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

66 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


600 Pa

### Max. motor power

150 W

## ENERGY CLASS

B



*Nube 90 - slim motor*

## NUBE

### Version

Slim motor 800 m<sup>3</sup>/h

### Collection

Design+


### EAN code

8034122363233

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Capacity (m <sup>3</sup> /h) I.E.C.61591	245	350	470	540
Maximum pressure (Pa)	400	480	530	600
Motor Power (W)	100	110	120	150
Air outlet	220x90	220x90	220x90	220x90

## CAPACITY / PRESSURE

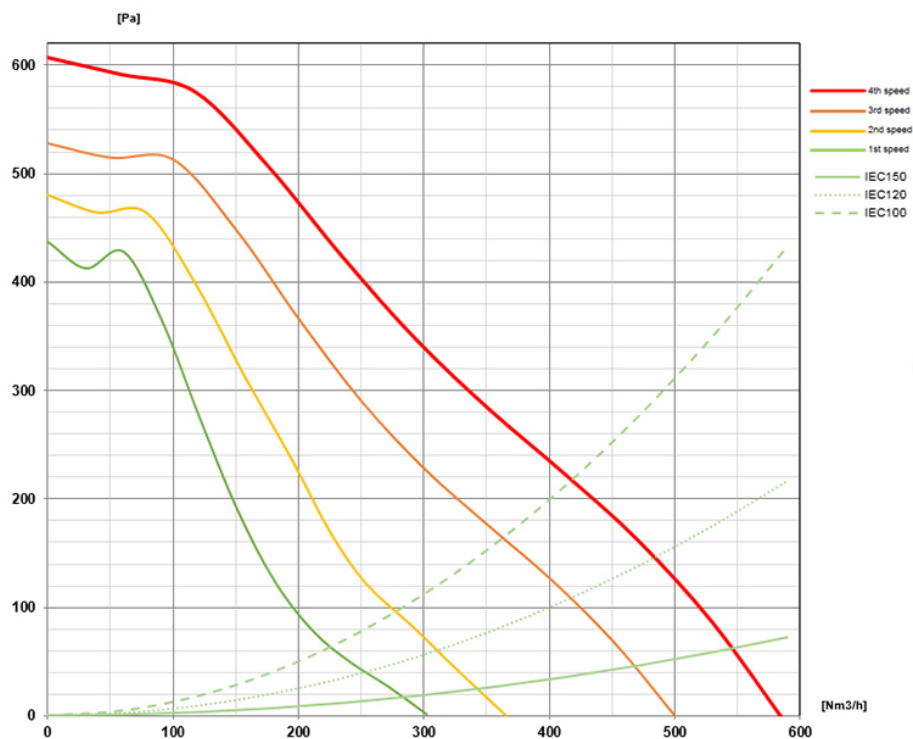

## NUBE

### Version

Slim motor 800 m<sup>3</sup>/h


### Collection

Design+

### EAN code

8034122363233

## ENERGY LABEL

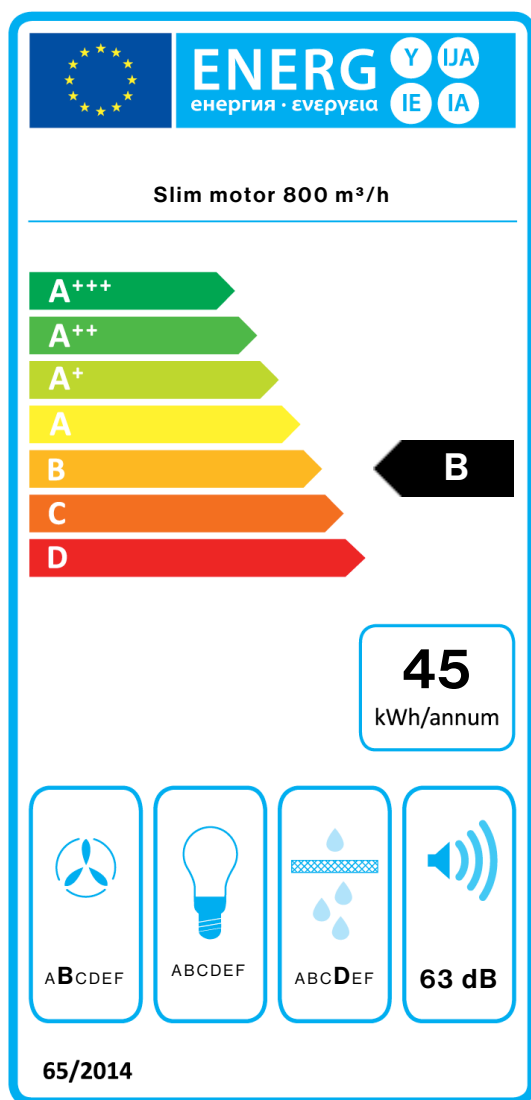

PF		
S	Falmec Spa	
M	Slim motor 800 m <sup>3</sup> /h	
AEC	45,4	kWh/a
EEC	B	
FDE	24,2	
FDEC	B	
LE	0,0	
LEC	0	
GFE	65,1	
GFEC	D	
Qmin	245,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	540,0	m <sup>3</sup> /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEL	58,6	
Qbep	332,0	m <sup>3</sup> /h
Pbep	297	Pa
Qboost	540,0	m <sup>3</sup> /h
Wbep	113,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	63	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.