

## FLIPPER

### Version

Wall 85 cm - Black - 800 m3/h

### Collection

Design

### EAN code

8034122350363



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Electronic control**  
**Metallic grease filter, removable and washable**  
**Optional combined regenerable Carbon.Zeo filter**  
**Charcoal filter included**  
**Possible to duct wall mounted from rear**  
**Optional Chimney**  
**Dimmable led lighting**  
**Dynamic LED Light (2700K - 5600K)**

Dynamic and dimmable Led light from 03.04.24

## OPTIONAL ACCESSORIES

### **KACL.770#41F**

Remote under-roof 1100 m3/h  
Brushless

### **KACL.786#41F**

Outdoor extractor fan 1000 m3/h

### **KACL.796#4AF**

Outdoor extractor fan 1500 m3/h

### **KACL.797#4AF**

Remote under-roof motor 1300 m3/h

### **KACL.798#41F**

Remote under-roof motor 950 m3/h

### **KACL.941**

External filter unit for sloped hoods

### **KCQAN.00#I**

Chimney (Inox)

### **KCQAN.00#N**

Optional chimney (Black)

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

85 cm

### Finishing

Black glass satin finishing  
Black tempered glass with  
Stainless Steel central band

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 2x1,2 W - 3200 K

### Filter

2 x Metallic filter "Base" -  
284x234 mm

### Charcoal filter

Round charcoal filter Ø170 mm -  
Type 6 (optional)

### Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

30 kg

### Net weight

25 kg

### Volumes

0.27 m<sup>3</sup>

### Packaging size

Length

950 mm

Height

440 mm

Depth

655 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

750 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

66 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


510 Pa

### Max. motor power

224 W

## ENERGY CLASS

A

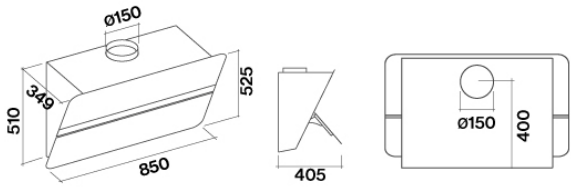

## FLIPPER

### Version

Wall 85 cm - Black - 800 m<sup>3</sup>/h

### Collection

Design


### EAN code

8034122350363

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	46	53	58	66
Capacity (m <sup>3</sup> /h) I.E.C.61591	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

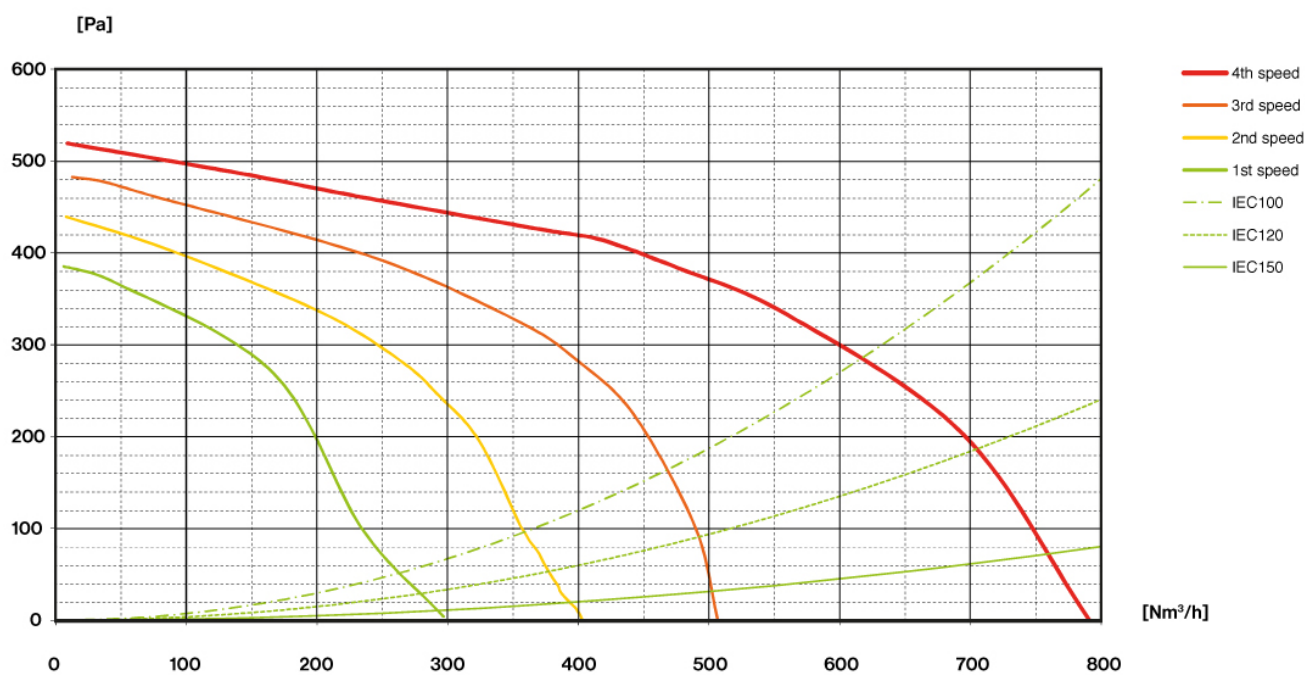

## FLIPPER

### Version

Wall 85 cm - Black - 800 m<sup>3</sup>/h


### Collection

Design

### EAN code

8034122350363

## ENERGY LABEL

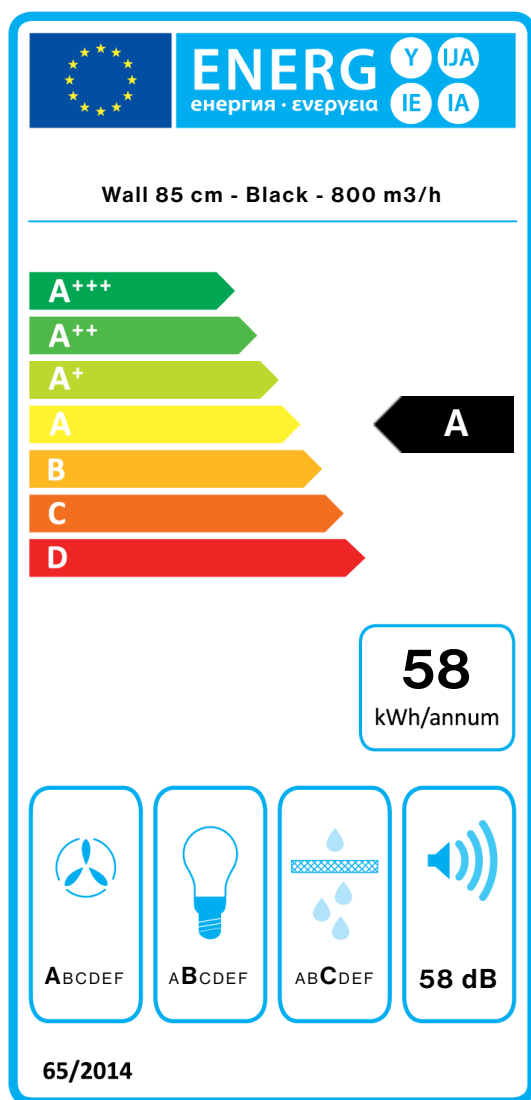

PF		
S	Falmec Spa	
M	Wall 85 cm - Black - 800 m <sup>3</sup> /h	
AEC	57,7	kWh/a
EEC	A	
FDE	29,4	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	295,0	m <sup>3</sup> /h
Qmax	500,0	m <sup>3</sup> /h
Qboost	750,0	m <sup>3</sup> /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	53,2	
Qbep	430,0	m <sup>3</sup> /h
Pbep	404	Pa
Qboost	750,0	m <sup>3</sup> /h
Wbep	164,0	W
WL	5,30	W
Emiddle	114	lx
Lwa-SPEmax	58	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.