

ZERO

Version

Zero - 84 cm - 600 m³/h -
Extracting version

Designer

Collection

Cooking systems

EAN code

8034122900933

FEATURES

Optional combined regenerable Carbon.Zeo filter
Residual heat indicators
Recall function: restore settings cooktop in case of accidental switching off
Keep warm function: maximum temperature 70°
Slider touch controls with red LED display
9 cooking levels + Power function (Over Boost)
Pot detector sensor
Automatic cut-off timer (for each cooking zone)
Timer / minute minder
Safety switch-off / safety lock function
Pause function
Brushless Motor
Carbon.Zeo filter maintenance warning
Auto mode (suction speed automatically adjusts to cooking power)
Bridge function
Emptied liquid collector
Power level management from 2.8kW to 7.4kW - Increment of 0.2kW

TECHNICAL FEATURES

Installation type
Worktop
Dimensions
84 cm
Finishing
Schott black glass
Motor
600 m³/h
Type of control
Touch control
Speed settings
9



*The photograph is purely for information
It may not correspond to the selected version.*

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
34 kg
Net weight
27.9 kg
Volumes
0.24 m³
Packaging size
Length
1055 mm
Height
375 mm
Depth
610 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
7560 W
Voltage
220-240V
Frequency
50-60Hz
ENERGY CLASS
A+

OPTIONAL ACCESSORIES

KACL.1017

Grill plate 410X240X25

KACL.155#NF

Kit: Quantum Black frame

KACL.930

Kit filters Carbon.Zeo

KACL.951

Underbase Slim filter unit
(h60mm)

KACL.955

Base grid (underbase Slim filter
unit - h60mm)

ZERO

Version

Zero - 84 cm - 600 m³/h -
Extracting version



Designer

Collection

Cooking systems

EAN code

8034122900933



ZERO

Version

Zero - 84 cm - 600 m3/h -
Extracting version

Designer


Collection

Cooking systems

EAN code

8034122900933

ENERGY LABEL

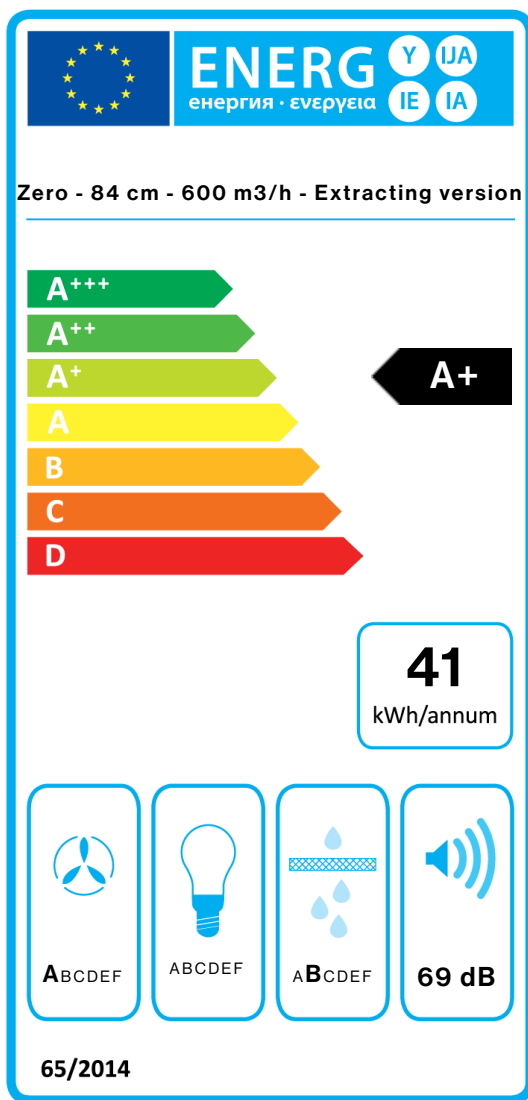

PF		
S	Falmec Spa	
M	Zero - 84 cm - 600 m3/h - Extracting version	
AEC	41,4	kWh/a
EEC	A+	
FDE	34,8	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	380,0	m ³ /h
Qmax	495,0	m ³ /h
Qboost	515,0	m ³ /h
SPEmin	62	dBa
SPEmax	69	dBa
SPEboost	70	dBa
PO	-	W
PS	0,48	W
PI		
F	0.8	
EEL	39,7	
Qbep	305,0	m ³ /h
Pbep	665	Pa
Qboost	515,0	m ³ /h
Wbep	162,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	69	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.