

## GRUPPO INCASSO PLUS

### Version

Plus - Built-in 70 cm - Inox -  
800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122367224



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

Perimeter suction  
Electronic control  
Metallic grease filter,  
removable and washable  
Optional charcoal filter  
Optional remote control  
Dimmable led lighting  
Dynamic LED Light (2700K -  
5600K)  
Dialogue system

## OPTIONAL ACCESSORIES

**KACL.770#41F**  
Remote under-roof 1100 m<sup>3</sup>/h  
Brushless  
**KACL.782#49F**  
Slim motor 800 m<sup>3</sup>/h  
**KACL.786#41F**  
Outdoor extractor fan 1000  
m<sup>3</sup>/h  
**KACL.796#4AF**  
Outdoor extractor fan 1500 m<sup>3</sup>/h  
**KACL.797#4AF**  
Remote under-roof motor 1300  
m<sup>3</sup>/h  
**KACL.798#41F**  
Remote under-roof motor 950  
m<sup>3</sup>/h  
**103050091**  
Round charcoal filter Ø170 mm -  
Type 6  
**105080053**  
Remote control

## TECHNICAL FEATURES


**Installation type**  
Built-in  
**Dimensions**  
70 cm  
**Finishing**  
Scotch brite stainless steel (AISI  
430)  
**Motor**  
800 m<sup>3</sup>/h  
**Type of control**  
Electronic control  
**Speed settings**  
4  
**Lighting**  
Led 2x2,3 W - 2700 K / 5600 K  
**Minimum distance**  
Gas hob: 62 cm  
Electric hob: 52 cm

## PACKAGING: WEIGHTS AND VOLUMES

**Gross weight**  
12 kg  
**Net weight**  
9.4 kg  
**Volumes**  
0.12 m<sup>3</sup>  
**Packaging size**  
Length  
855 mm  
Height  
380 mm  
Depth  
375 mm

## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
280 W  
**Current**  
220-240V  
**Frequency**  
50-60Hz  
**ENERGY CLASS**  
B



## GRUPPO INCASSO PLUS

### Version

Plus - Built-in 70 cm - Inox -  
800 m<sup>3</sup>/h


### Collection

Design

### EAN code

8034122367224

## ENERGY LABEL

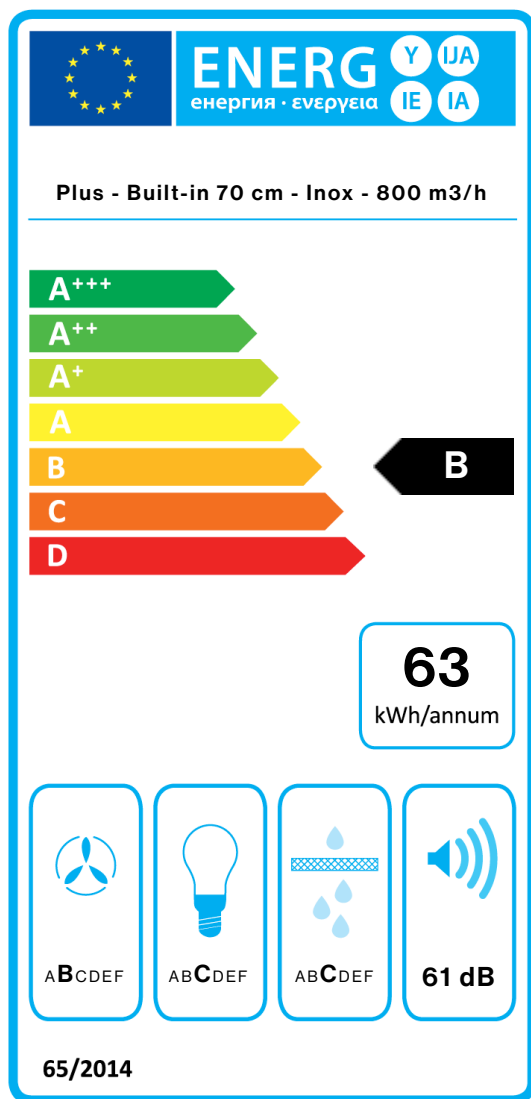

PF		
S	Falmec Spa	
M	Plus - Built-in 70 cm - Inox - 800 m <sup>3</sup> /h	
AEC	62,6	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	18,0	
LEC	C	
GFE	80,0	
GFEC	C	
Qmin	270,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	670,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	1.1	
EEL	63,2	
Qbep	333,0	m <sup>3</sup> /h
Pbep	407	Pa
Qboost	670,0	m <sup>3</sup> /h
Wbep	670,0	W
WL	4,50	W
Emiddle	81	lex
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.